

(UNECE Regulation 127 Proposal)

- 2.14. "*Corner of bumper*" means the vehicle's point of contact, whichever is on the outer side
- (a) with a vertical plane which makes an angle of 60° with the vertical longitudinal plane of the vehicle and is tangential to the outer surface of the bumper (see Figure 5a)
 - (b) the outermost point between 406 mm up to 508 mm from ground with a vertical plane which makes an angle of 60° with the vertical longitudinal plane of the vehicle (see Figure 5b)

Corner of bumper

Figure 5a

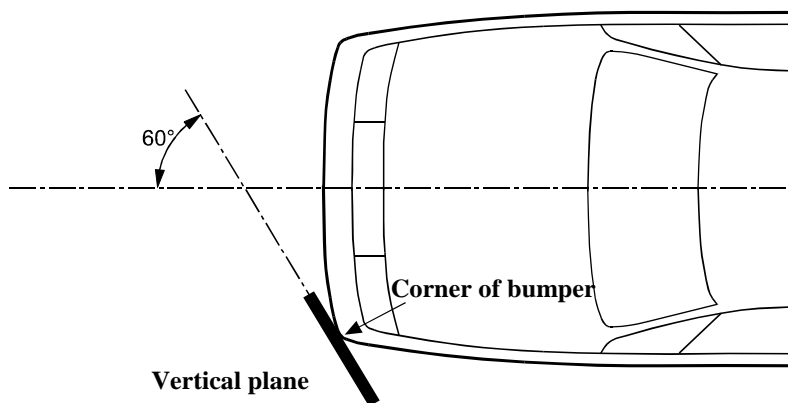


Figure 5b

