

Review of Seatbelt Anchorage and Dimensions of Test Bench Seat Cushion

JASIC

Motivation and Purpose

- There is no definition about whether seatbelt anchorage should be fixed or not.




- We tested the same test conditions except for that the ISOFIX anchorage is fixed or movable, and the injury measures of a dummy were compared.
 - From those results, we reviewed that the seatbelt anchorage should be fixed or movable.

Side Impact Test Methods




- We used acceleration type sled test system
- We used Q3 dummy
- We tested 2 kinds of ISOFIX type CRS

CRS

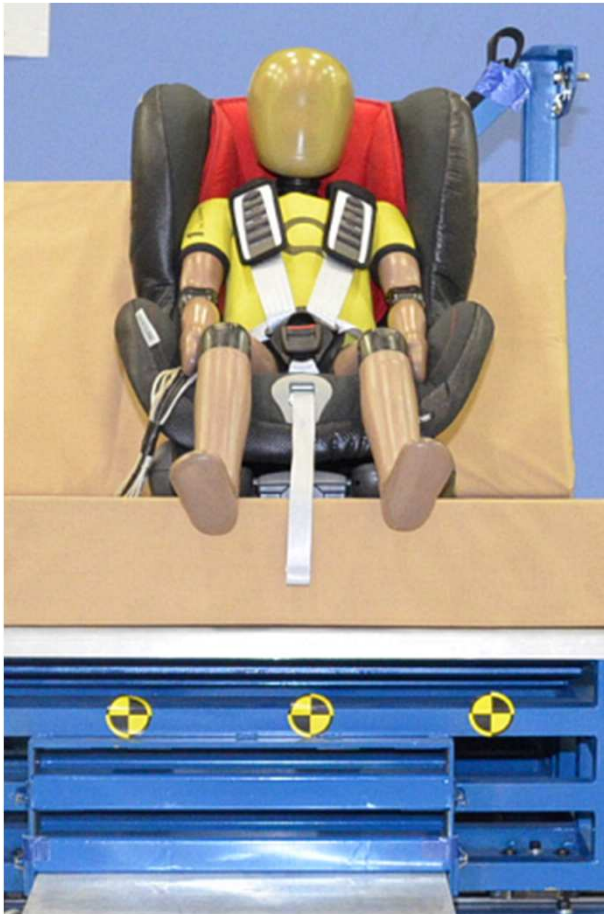


CRS-A

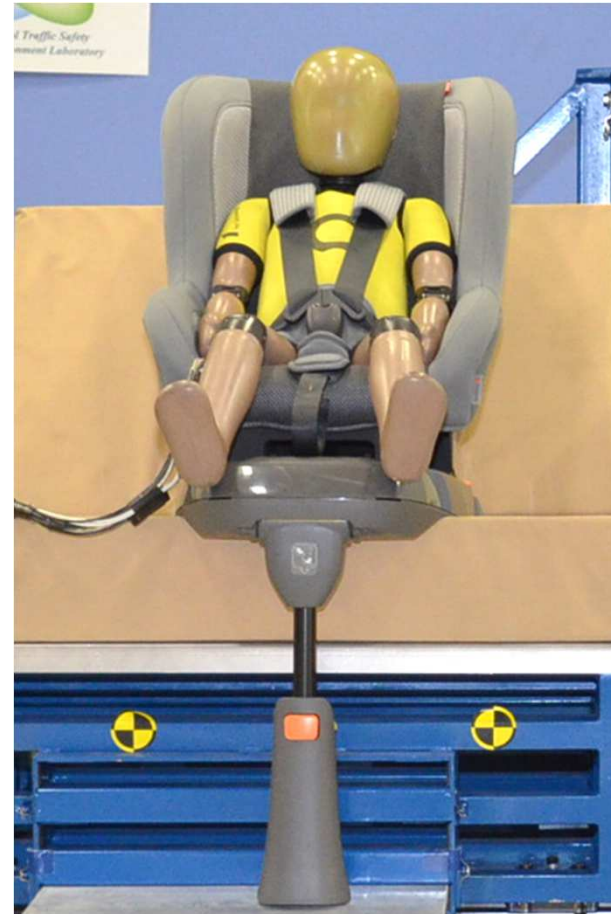

CRS-B

Door Velocity, and Relative Velocity between Door and Seat

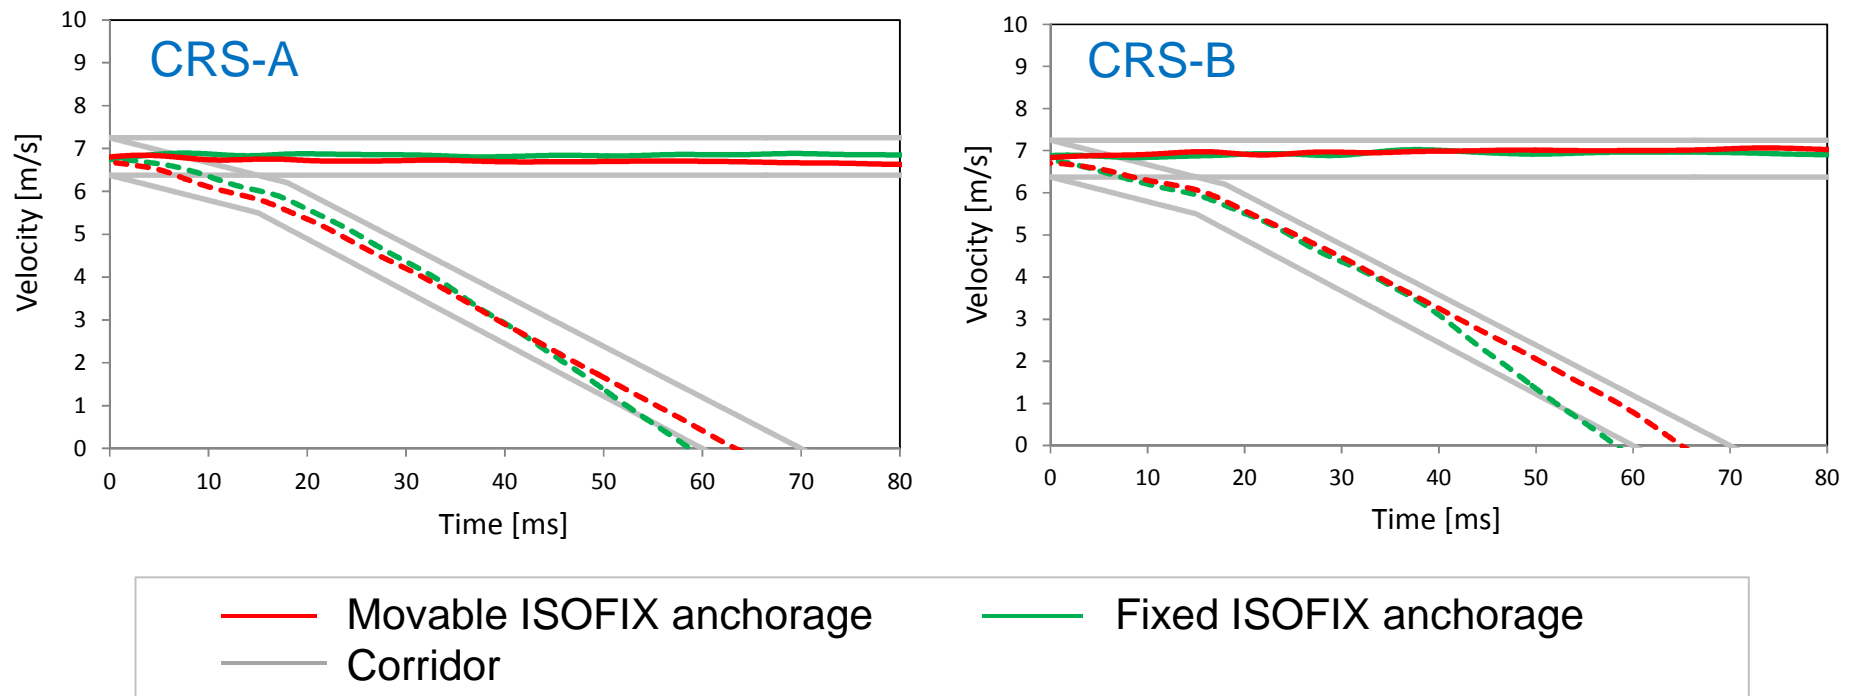

- The door velocities were in Corridor
- The relative velocities when ISOFIX anchorage fixed were out of corridor after 50ms, but it was the time after the maximum dummy injury measures . So we think it was not influenced to the comparisons.

Test Video of CRS-A






Movable ISOFIX anchorage



Fixed ISOFIX anchorage

Dummy Accelerations (CRS-A)

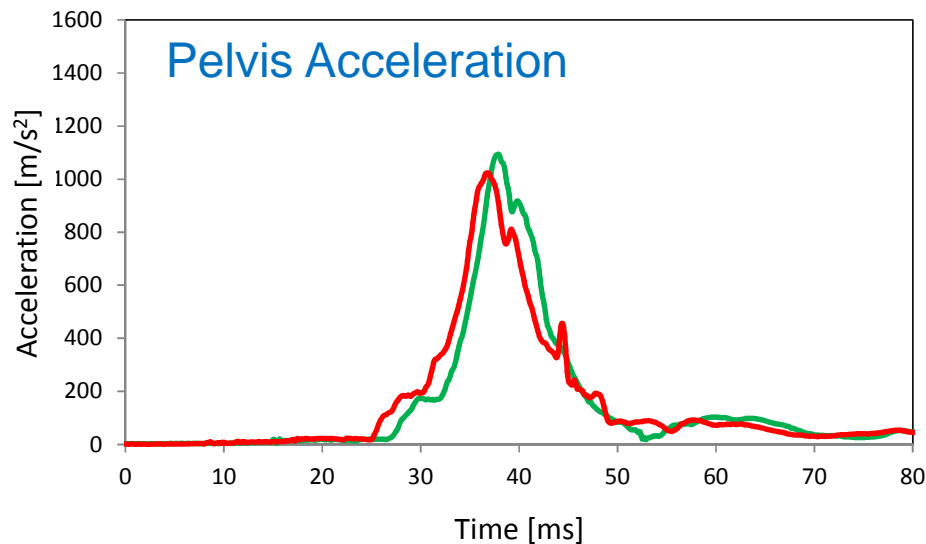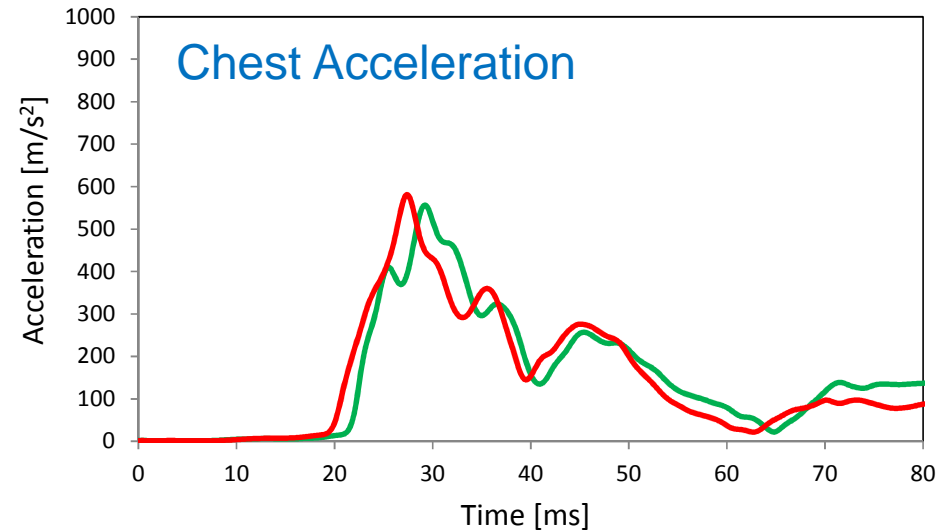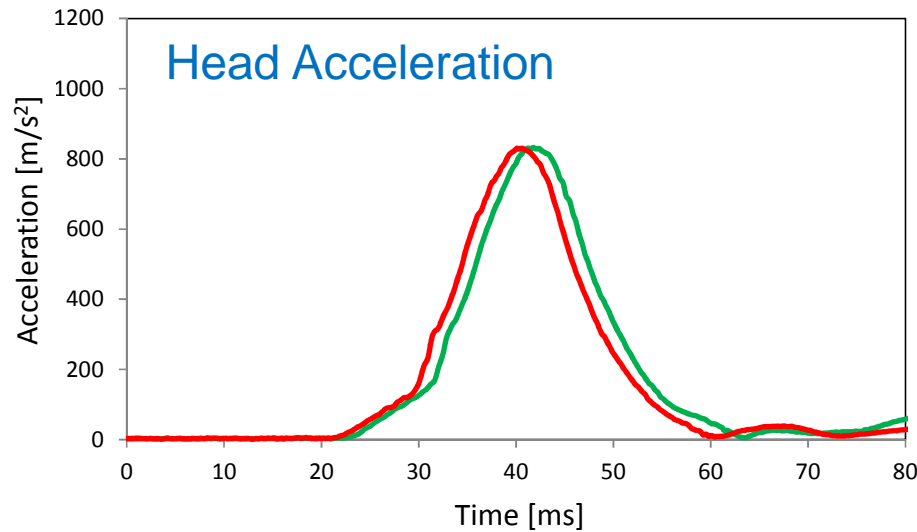


— Movable ISOFIX anchorage
— Fixed ISOFIX anchorage

Test Video of CRS-B




Movable ISOFIX anchorage

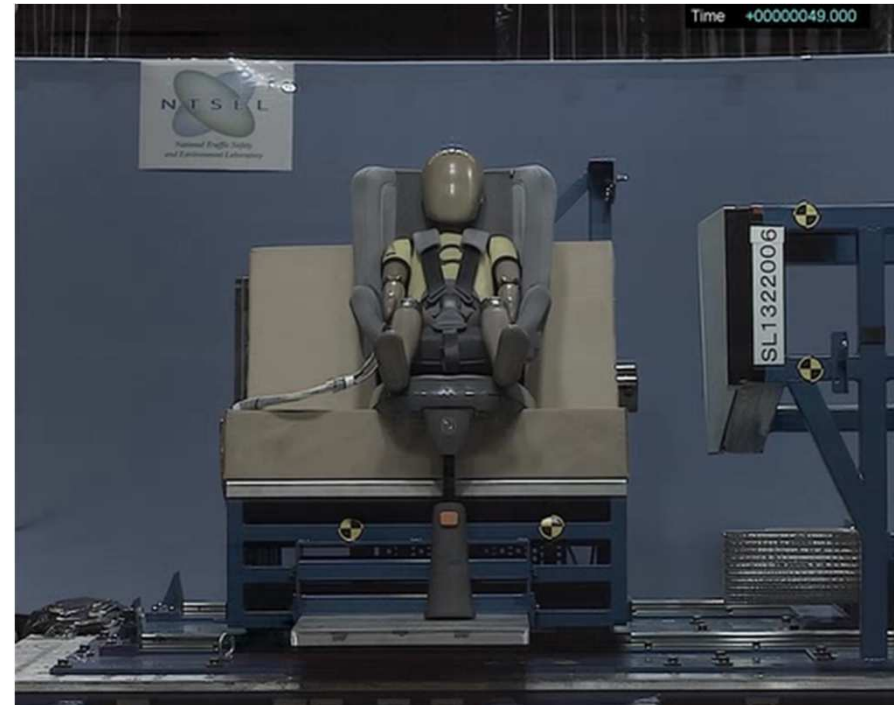

Fixed ISOFIX anchorage


Dummy Accelerations (CRS-B)

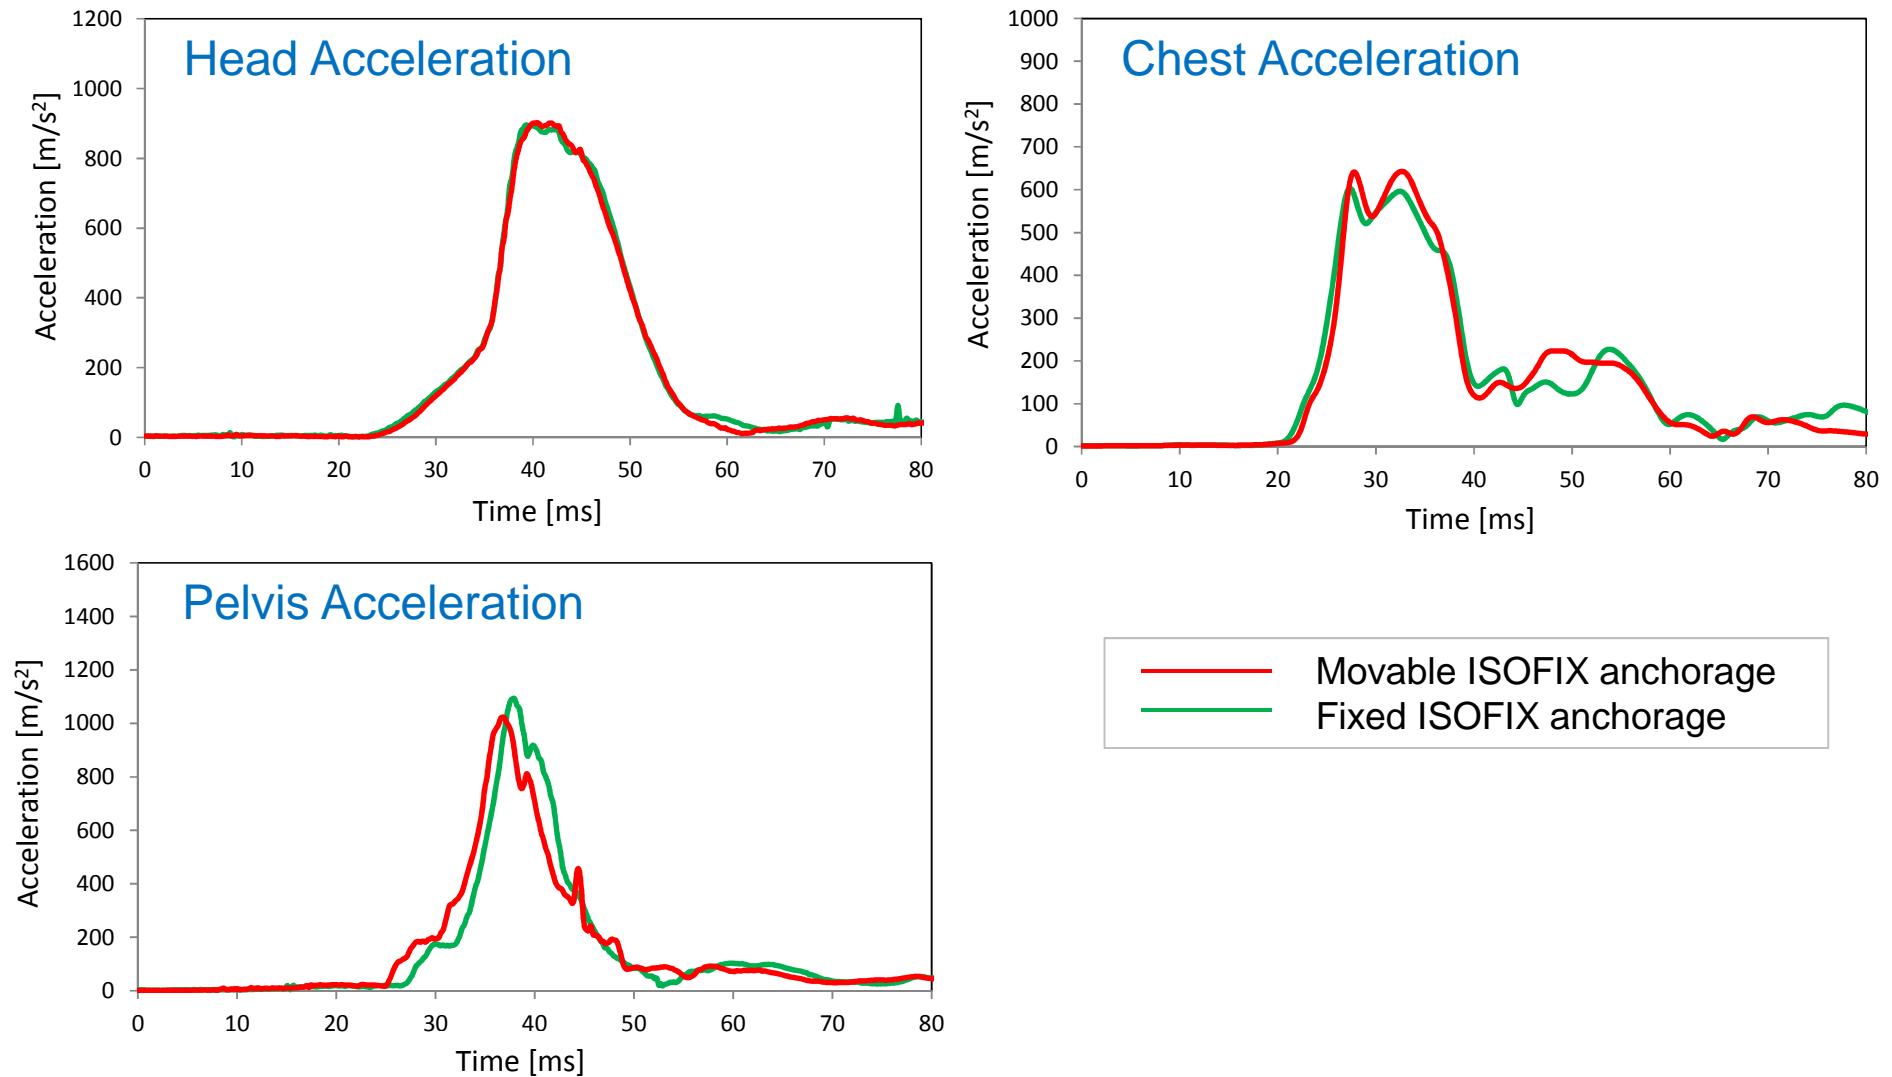


Maximum Dummy Injury Measures

Region	Injury measure	Unit	Threshold	CRS-A		CRS-B	
				ISOFIX Anchorage		ISOFIX Anchorage	
				Movable	Fixed	Movable	Fixed
Head	HPC15	—	800	523	533	697	713
	3ms Acceleration	G	80	81.5	82.6	90.9	89.2
Chest	Chest deflection	mm	—	18.9	16.1	21.4	21.2
	3ms Acceleration	G	—	47.1	47.9	60.8	57.5
Pelvis	3ms Acceleration	G	—	83.5	89.5	108.2	104.9

Photos of CRS Before / After Test (CRS-A)

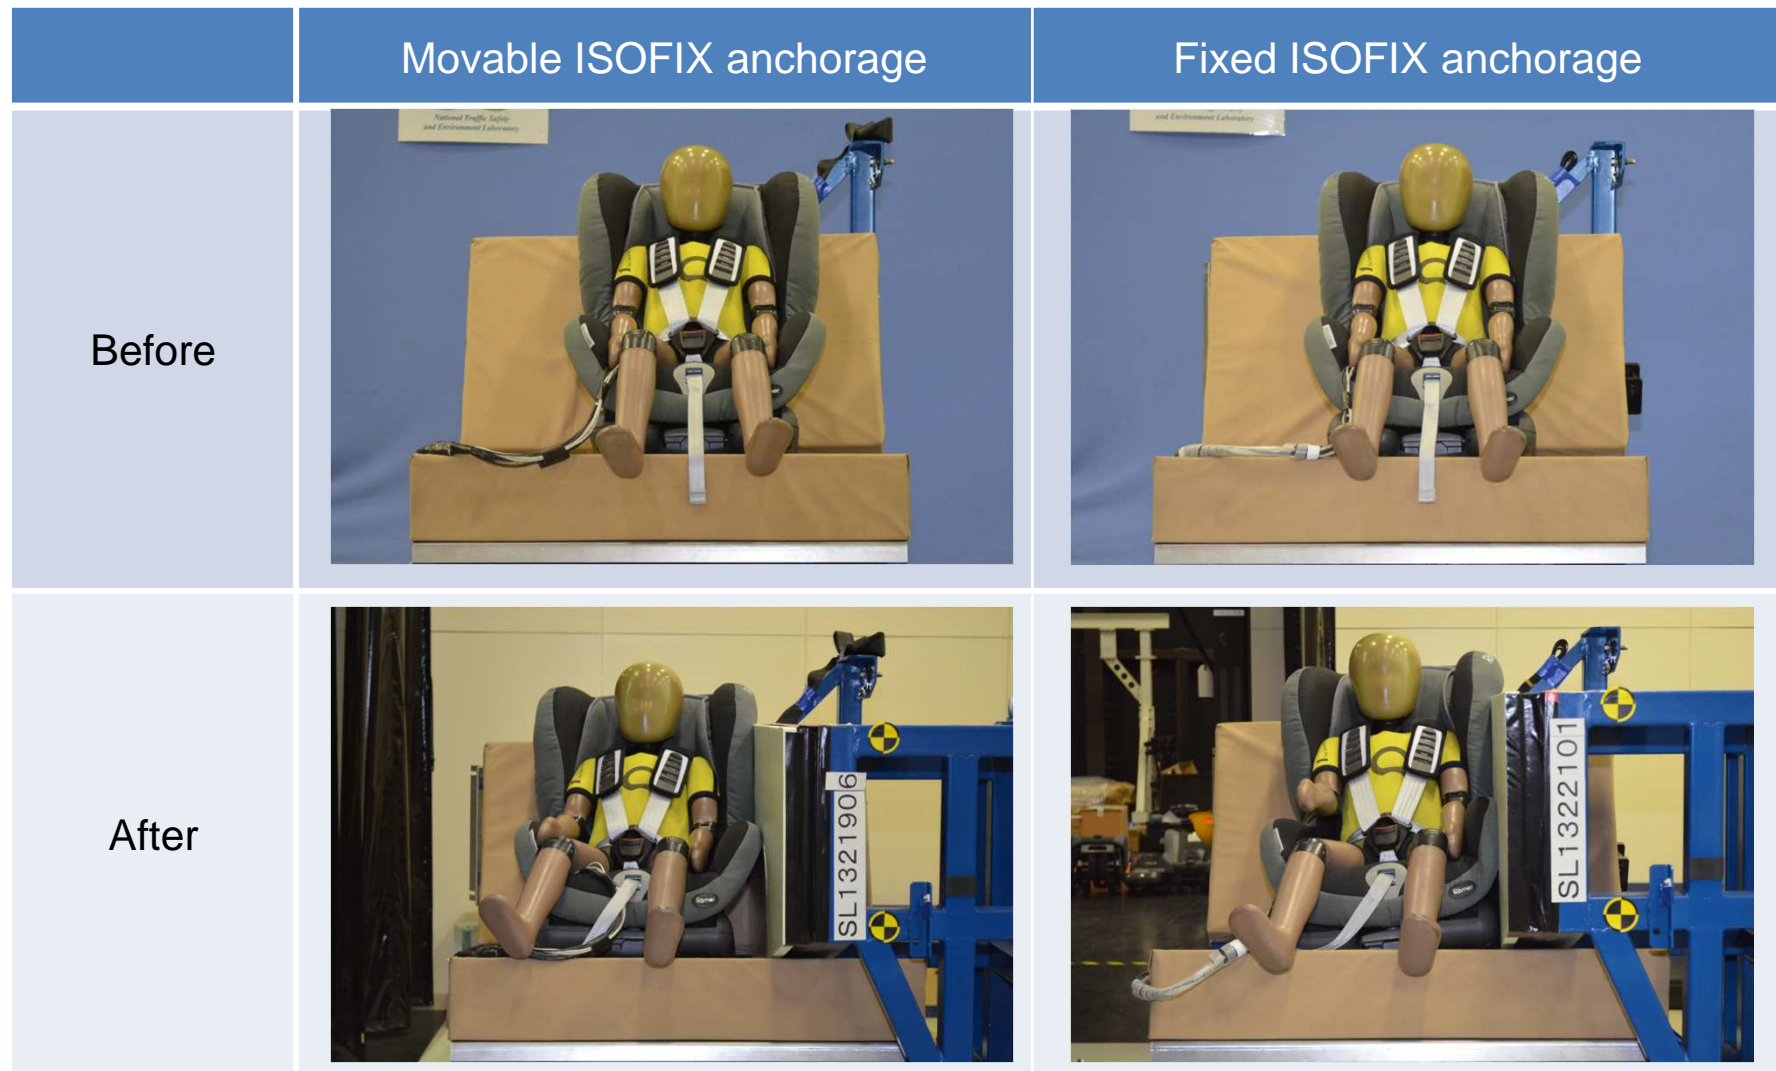

Photos of CRS Before / After Test (CRS-B)

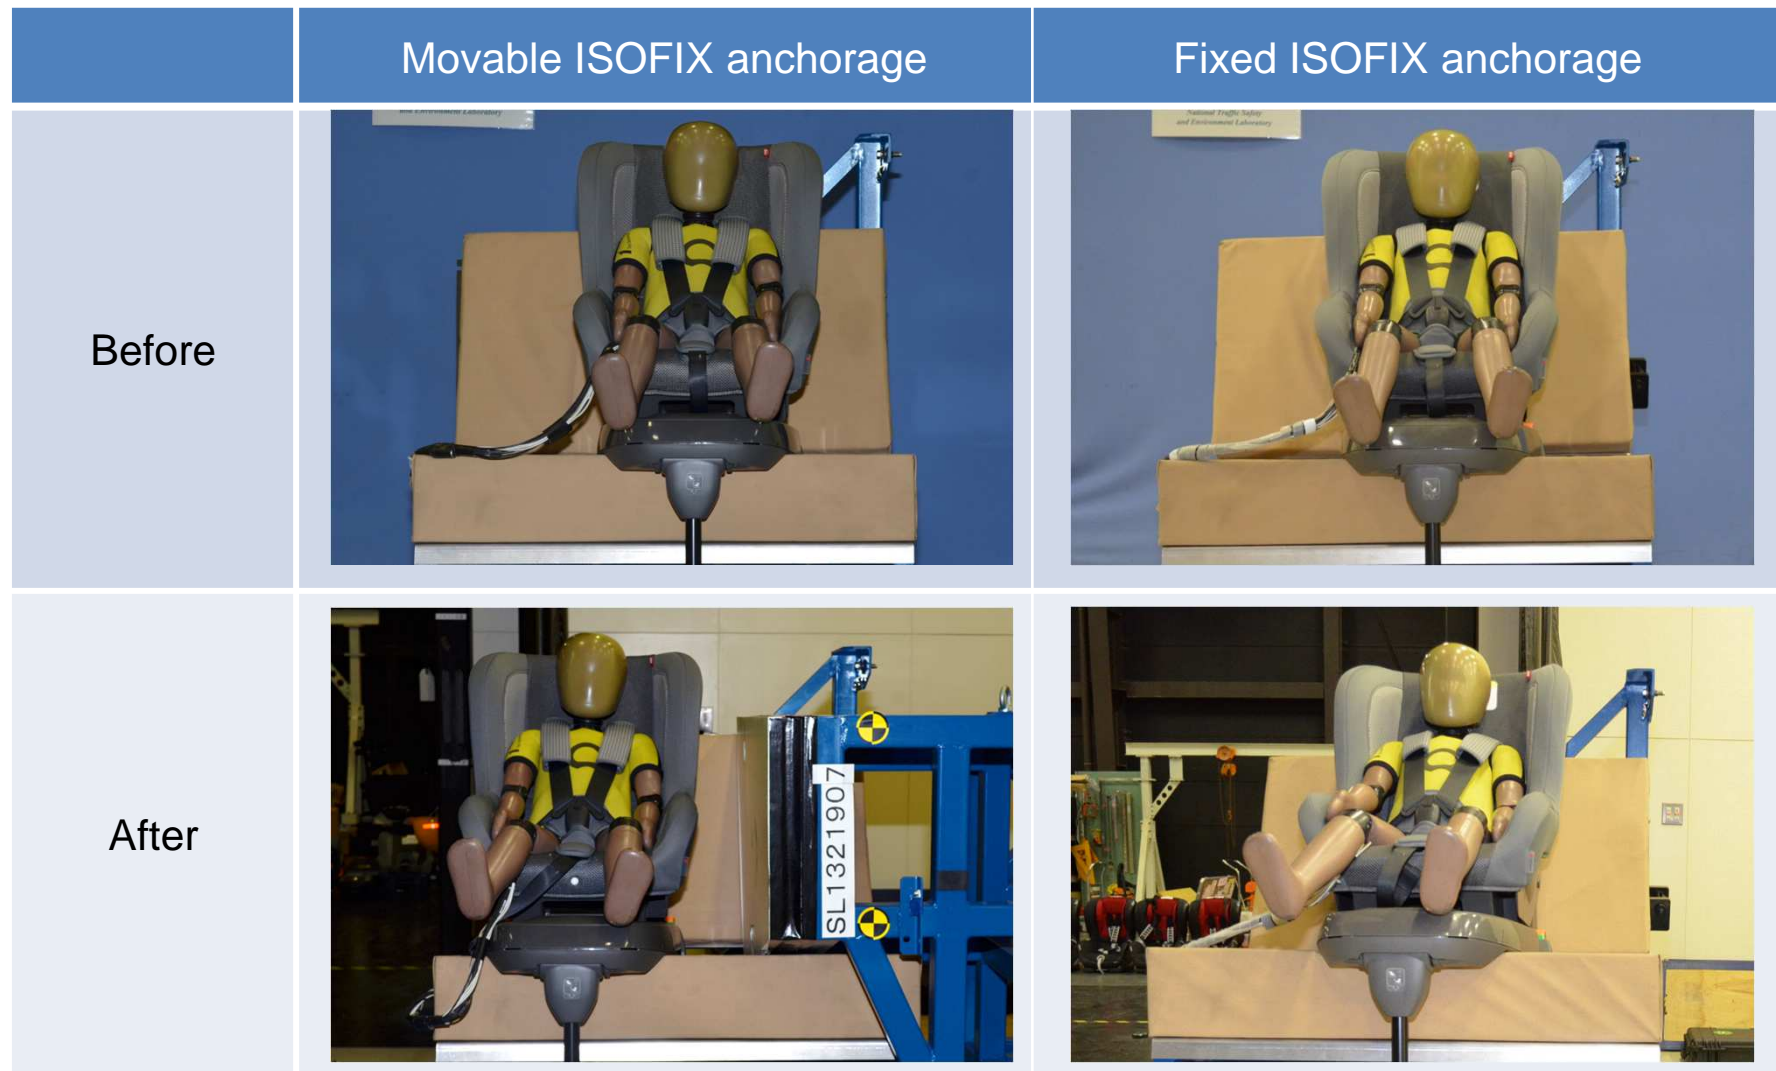

Photos of ISOFIX Connector after Tests

	Fixed ISOFIX anchorage	
CRS-A		
CRS-B		

Photos of ISOFIX Connector after Tests

Fixed ISOFIX anchorage (CRS-A)



ISOFIX connector was broken.

Conclusion about ISOFIX Anchorage

- Injury measures under conditions that the ISOFIX anchorage was fixed and movable were almost similar.
- There were cases that ISOFIX connector lever could not be moved when ISOFIX anchorages were fixed, so we could not release the ISOFIX connector and it took a long time to remove a CRS from the test bench seat.
 - It was easy to remove a CRS from the ISOFIX anchorage when the ISOFIX anchorages were movable.



We think it is better that the ISOFIX anchorage is movable.

Side Impact Test Methods



- We used acceleration type sled test system
- We used Q3 dummy
- We tested CRS fixed by seatbelt


Conclusion about Seatbelt Anchorage

- It was easy to remove CRS fixed by seatbelt from test bench seat.
- A movable seatbelt anchorage may make structure of the jig complex.




It is considered that a fixed seatbelt anchorage is an advantage because the different between fixed and movable anchorages has a small effect on injury measures.

Dimensions of Test Bench Seat Cushion

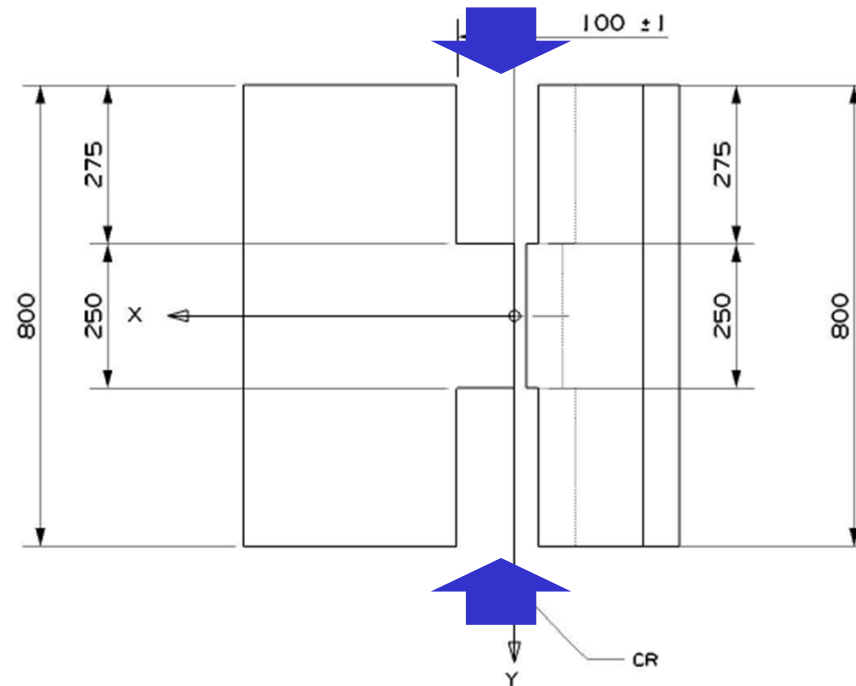


- There are cutouts in a seat defined in the new regulation.
- The difference between fixed and movable anchorages has a small effect on injury measures.
 - Injury measures are almost the same regardless of a distance when a CRS moves on a seat. There is no influence of a friction.

Dimensions of Test Bench Seat Cushion

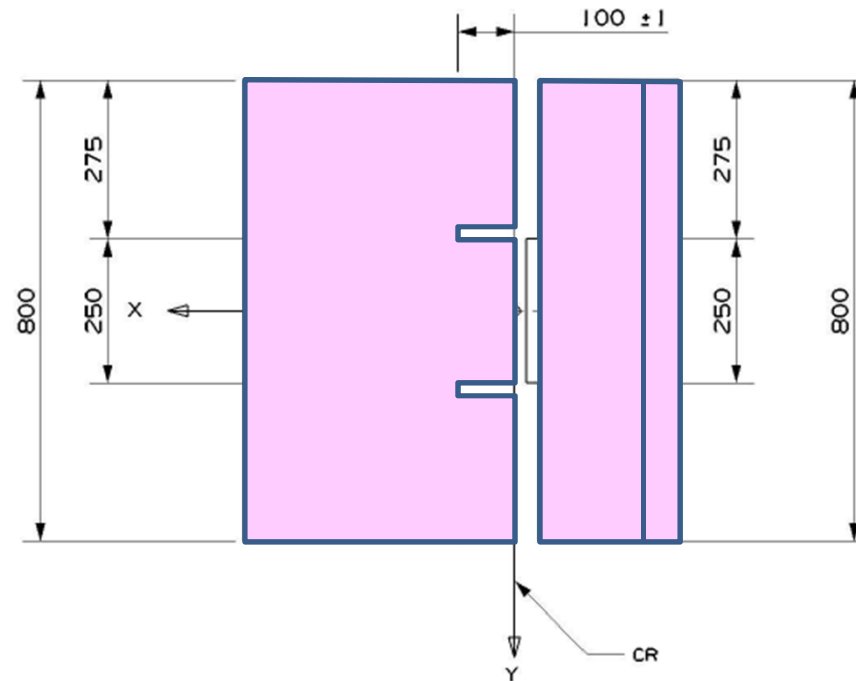


- A seat shape has a small effect.
- We think it is better that a seat shape is simple because it is easy to make the cushion, for example, like the shape defined in UN.

Dimensions of Test Bench Seat Cushion for Side Impact

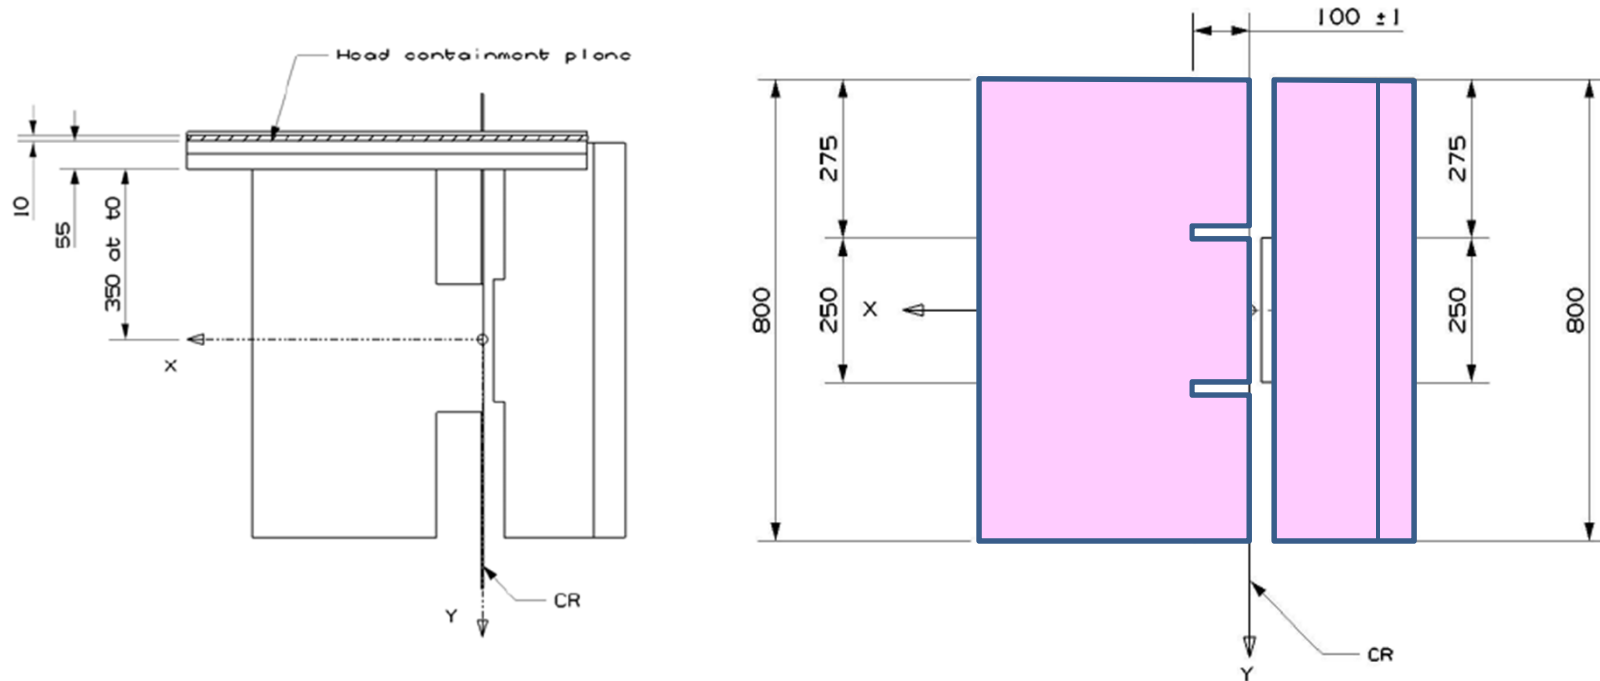

- $T=0\text{ms}$ is defined when a door surface reaches the position of 350mm from the center of a CRS.
- $T=0\text{ms}$ is the time when a door reaches the position of 50mm from a seat end.

Setting of $T=0\text{ms}$ for Side Impact Test

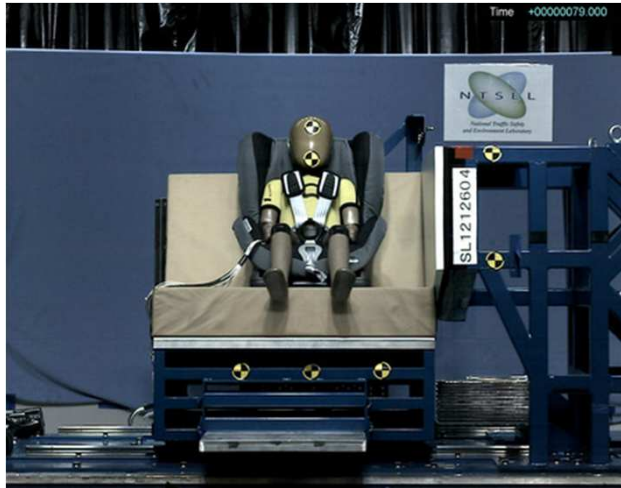


Door reaches a seat end



Door reaches the position of 50mm from a seat end

- It is easier to set $T=0\text{ms}$ for the time when a door reaches a seat end than the time when a door reaches the position of 50mm from a seat end.
- We think it is better that the center of a CRS is the position of 350mm from a seat end for the seat cushion of side impact test.

Dimensions of Test Bench Seat Cushion for Side Impact

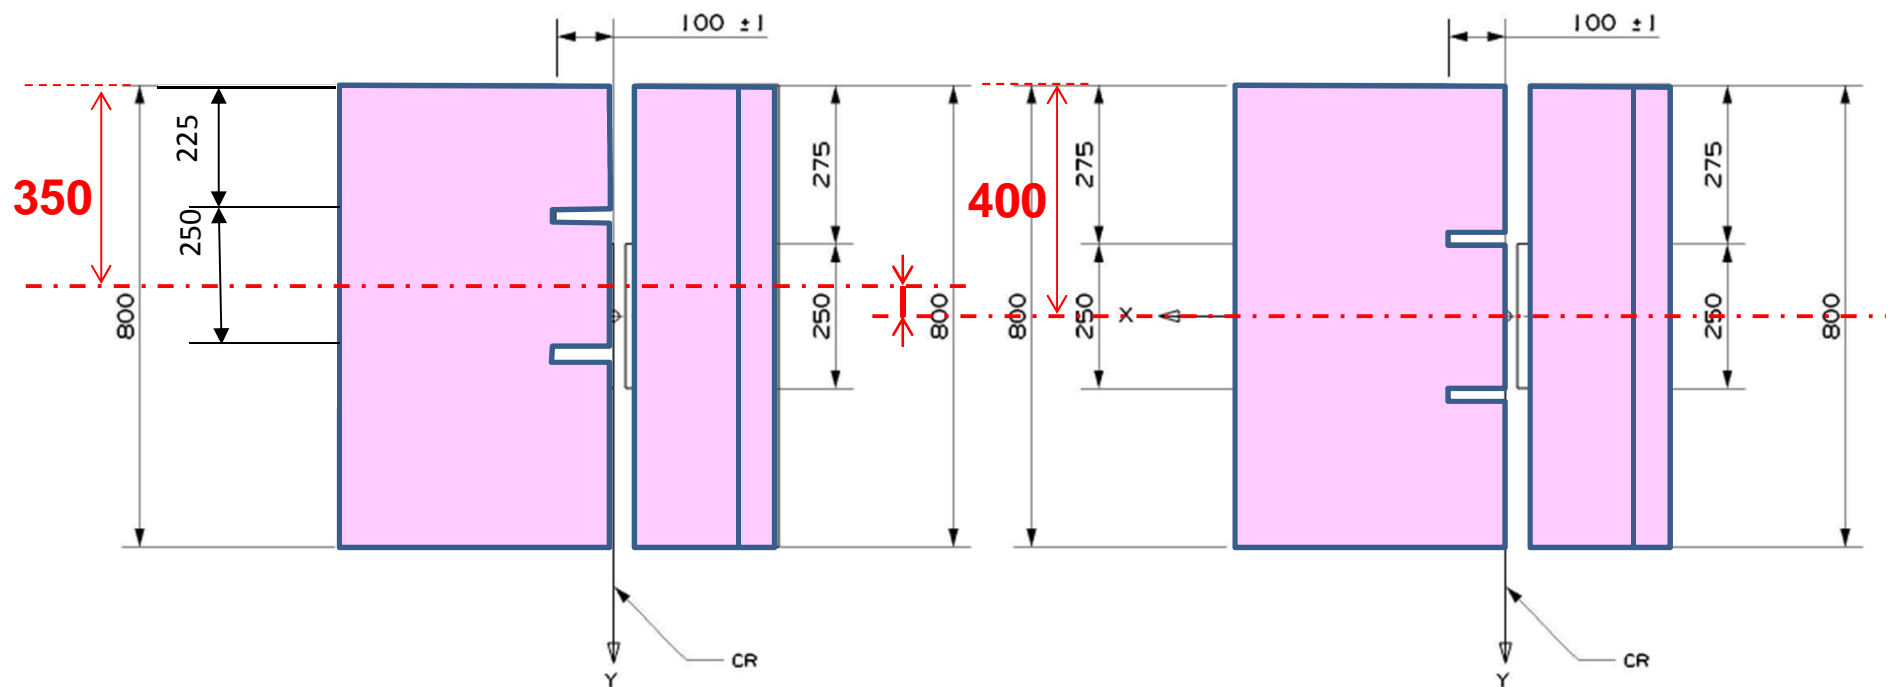

- The center of a CRS is located between 350mm and 400mm from a seat end. (Only for side impact test)