

Informal document: **GRSP-58-22**
(58th GRSP, 8 - 11 December 2015,
agenda item 15 an 19)

GRSP December 2015

ECE R129 Amendments N°1 & 2

I-Size principles

- I-Size seating position:
 - Compatible with R1, R2, F2X, F4
 - Children from 40 cm to 135 cm
- I-Size ECRS :
 - Integral rearward facing: from 40 cm or less
 - Integral forward facing: from 76 cm & >15 months
 - Non-integral forward facing: from 100 cm & <135 cm (with backrest)
- Non-integral forward facing without backrest stay in ECE R44


REG 129 type approval principles

- Size range defined by CRS manufacturer
- One Type approval for all size range
- One type approval for convertible or modular ECRS
- Only one type approval marking allowed on only one component
- Multi modules ECRS must have common identification marking (Module Marking)
- Multi categories type approval is allowed without size gap
- Specific vehicle ECRS covers:
 - Old Semi-Universal Type approval (on test bench)
 - Specific to vehicle approval on Sub assembly sled test
 - Specific to vehicle approval on vehicle full scale test


Compatibility Vehicle/ECRS

- Any I-Size ECRS fit on any I-Size seating position
- Specific vehicle ECRS compatible with any ISO fixtures as defined in R16 fit the vehicle seating positions declared for this ISO fixture in vehicle handbook

R129

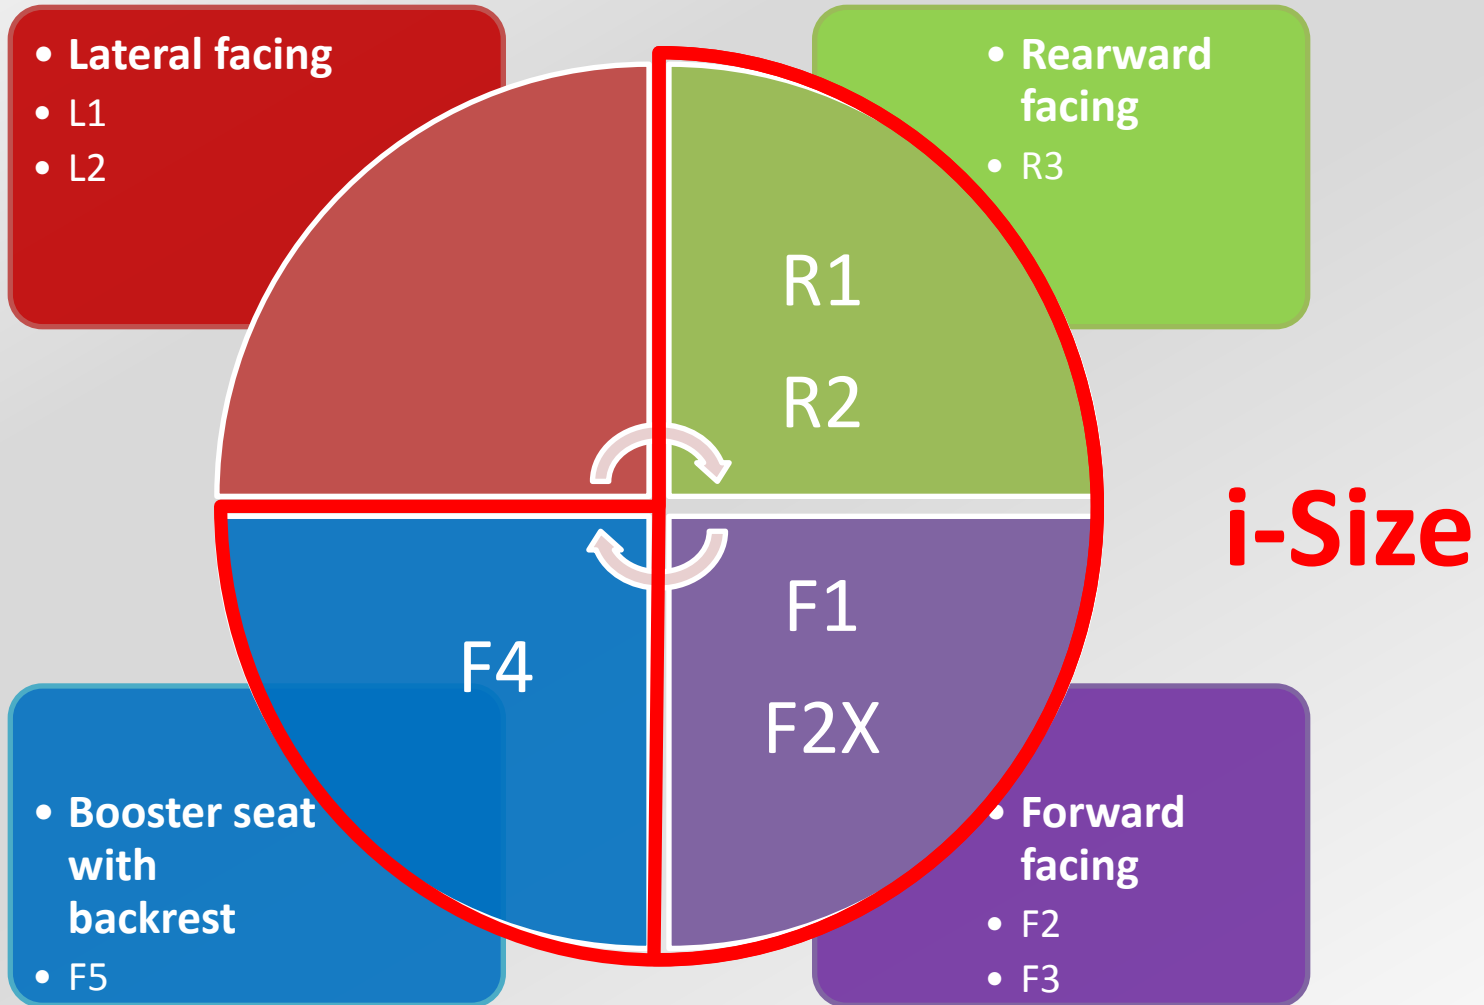


R129

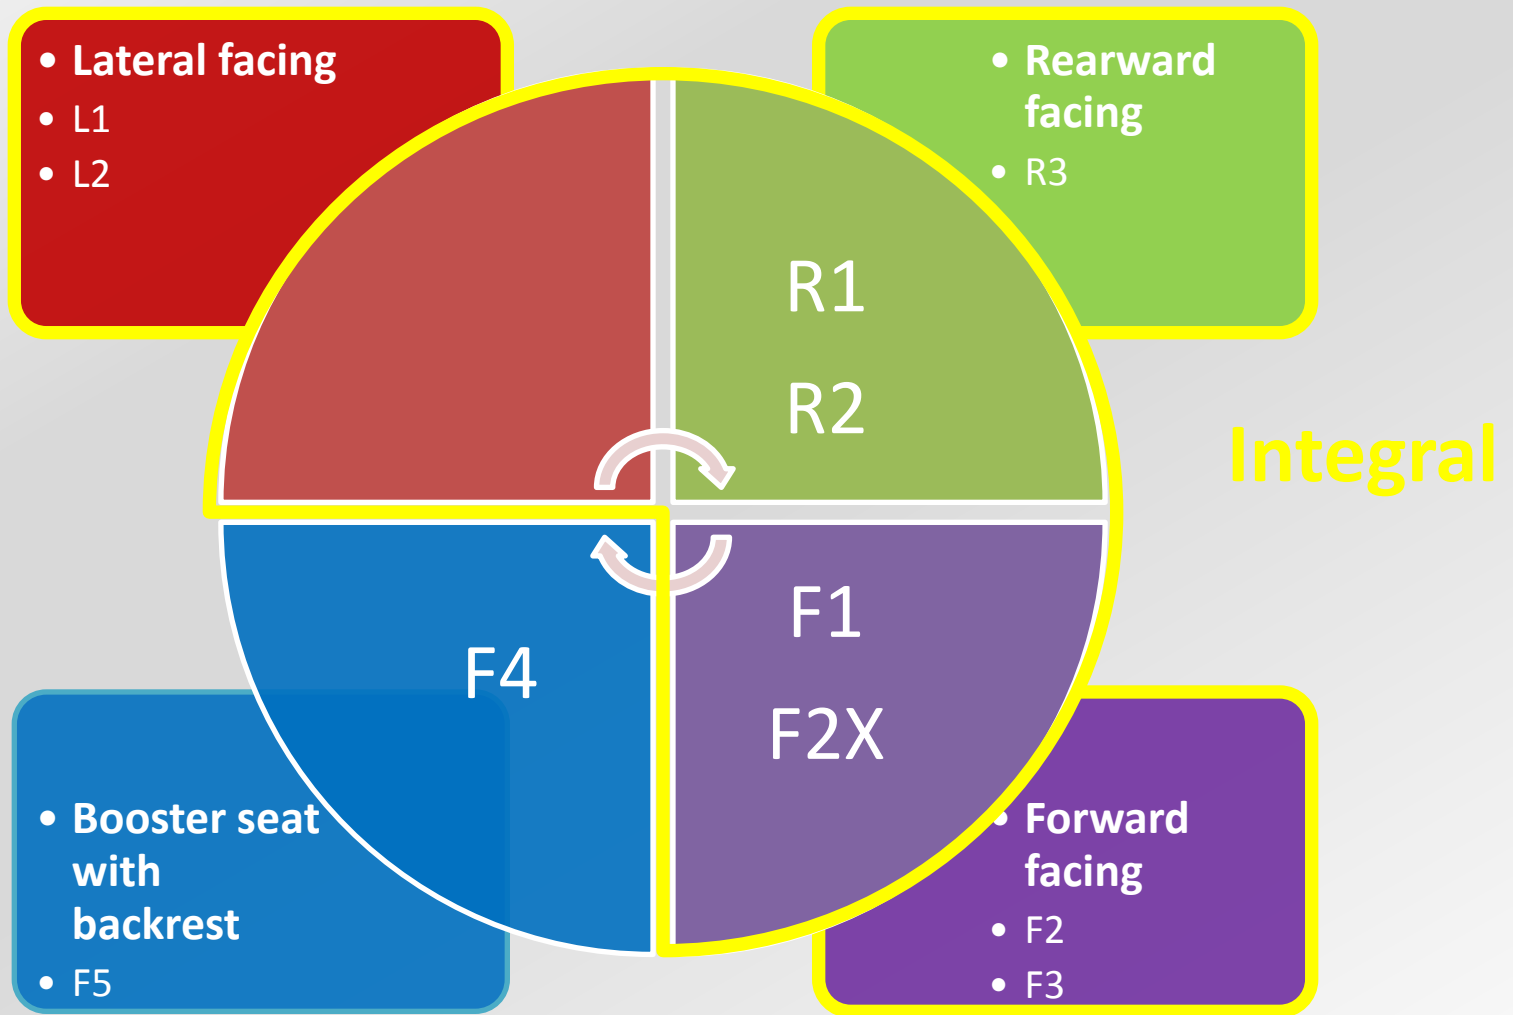

Documents for 58th GRSP session

- **ECE/TRANS/WP.29/GRSP/2015/32 - (France)**
Proposal for Supplement 11 to the 04 series of amendments to Regulation No. 44 (Child restraint systems)
- **ECE/TRANS/WP.29/GRSP/2015/24-Rev1 GRSP58-07 - (France)**
Proposal for the 01 series of amendments to Phase 1 of Regulation No. 129 (Enhanced Child Restraint Systems)
- **ECE/TRANS/WP.29/GRSP/2015/31-Rev1 GRSP58-08 - (France)**
Proposal for the 02 series of amendments to Phase 2 of Regulation No. 129 (Enhanced Child Restraint Systems)



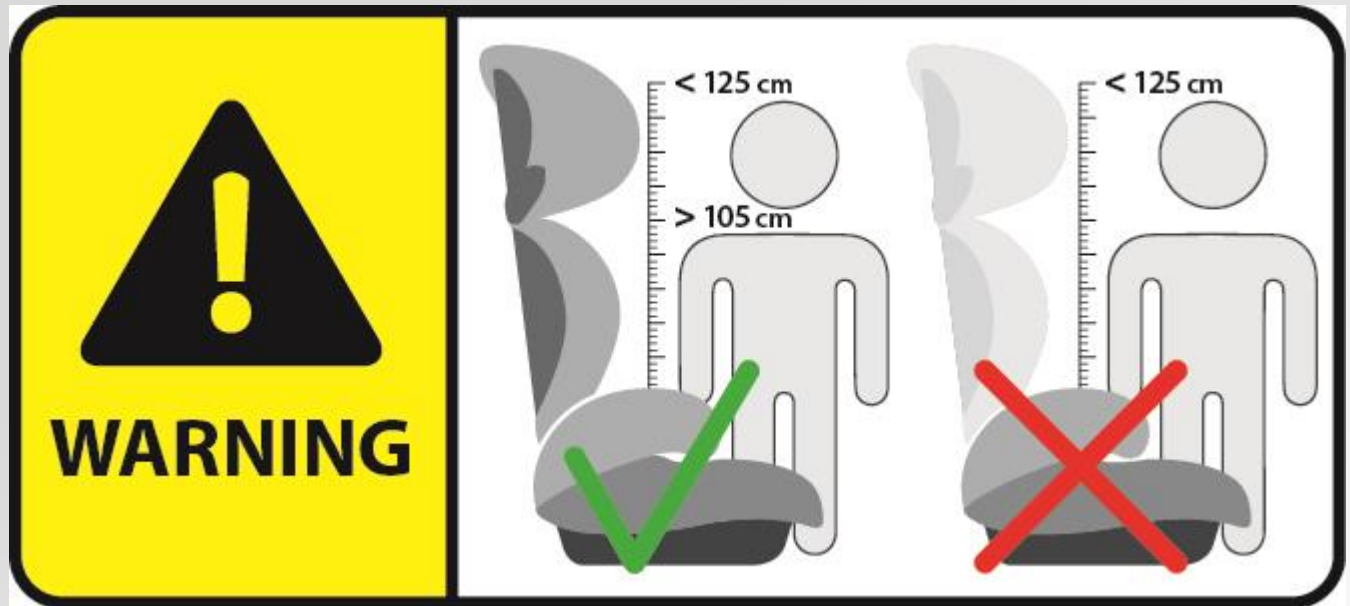

Documents for 58th GRSP session

- **ECE/TRANS/WP.29/GRSP/2015/32 - (France)**
Proposal for Supplement 11 to the 04 series of amendments to Regulation No. 44 (Child restraint systems)
- **ECE/TRANS/WP.29/GRSP/2015/24-Rev1 GRSP58-07 - (France)**
Proposal for the 01 series of amendments to Phase 1 of Regulation No. 129 (Enhanced Child Restraint Systems)
- **ECE/TRANS/WP.29/GRSP/2015/31-Rev1 GRSP58-08 - (France)**
Proposal for the 02 series of amendments to Phase 2 of Regulation No. 129 (Enhanced Child Restraint Systems)