




Transmitted by OICA

# Proposal for definition of Unique Identifier (UI)

- One UI **represents** a specific part and its certification relevant characteristics from all regulations, for which it has been approved
- A characteristic of the part is certification relevant, if it is mentioned in the application document or if its modification could require a re-test. As long as no new approval is required by the modification of the part, the original and the modified part fulfill the same level of conformance.
- As long as the same level of conformance is given for all the regulations, for which the part has been approved, the UI remains the same
- Otherwise a new UI is required

**UI** 000001

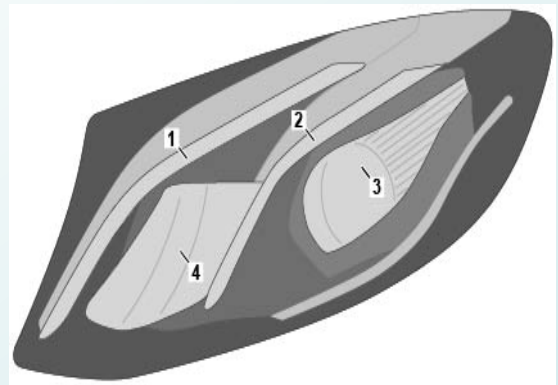


**1 Fibre-optic LEDs**  
 Daytime running lamps ECE R87 (E1 00 4123)  
 Front position lamp ECE R7 (E1 02 4123)  
 Direction indicator ECE R6 (E1 01 4123)

**3 Mono LED module**  
 Passing beam ECE R112 (E1 01 4123)

**2 Fibre-optic LEDs**  
 Daytime running lamps ECE R87 (E1 00 4123)  
 Front position lamp ECE R7 (E1 02 4123)

**4**  
 Driving beam module ECE R112 (E1 01 4123)

**UI** 000002

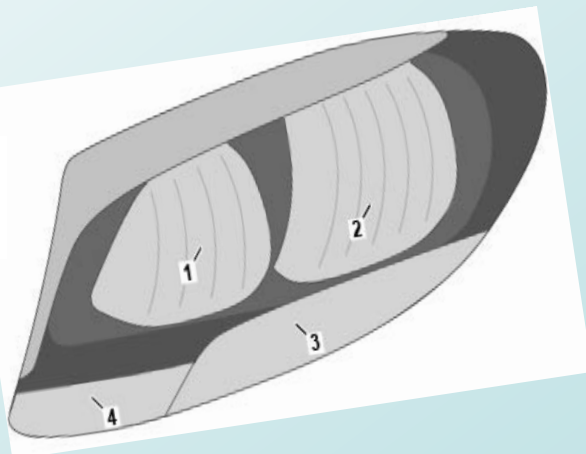

**1**  
 H7 driving beam ECE R112 (E1 01 4047)

**3**  
 Daytime running lamps ECE 87 (E1 00 4047)  
 Front position lamp ECE R7 (E1 02 4047)

**2**  
 H7 passing beam ECE R112 (E1 01 4047)

**4**  
 Direction indicator ECE R6 (E1 01 4047)

# Definition of Unique Identifier (UI)

#	Part modification	Regulation update	Impact on approval	Impact on Approval Marking ECE (today)	Impact on UI (in future with DETA)
1	New	-	New approval	Approval N° is granted; approval marking is placed on the part	Approval N° is linked with UI; UI is placed on the part
2	X	-	None	None	None
3	X	-	Extension	None	None
4	X	-	New approval (change requires new type)	New approval required: new approval marking	New UI is placed on the changed part
5	-	X	Extension	None	None
6	X	X	Extension/New approval (change requires new type)	Extension: No change/ New approval required: new approval marking	New UI is placed on the changed part
7	-	X	Additional new approval	Additional approval N° is granted; Additional approval marking on the part	No change of UI; UI is linked to all relevant approvals
8	Part also fulfils regulation other than UNECE (e.g. CCC)		New approval (other than ECE)	Additional approval N° is granted; Additional approval marking on the part	No change of UI; UI is linked to all relevant approvals
9	Manufacturer applies for a new UI		Approval (worldwide) has been changed	None	New UI linked to the approval N°