


2nd Task Force Meeting

QRTV

Principle

- The vehicle shall fulfilled minimum sound level requirements with or without AVAS in any cases from 0 to 20 km/h.
- The speed range activation of AVAS is in charge of manufacturer to achieve minimum sound level requirements

France proposals for EV and HV in their E mode (M1/N1 and/or M2/N2/M3/N3 and/or L1-5 and/or L6/L7)

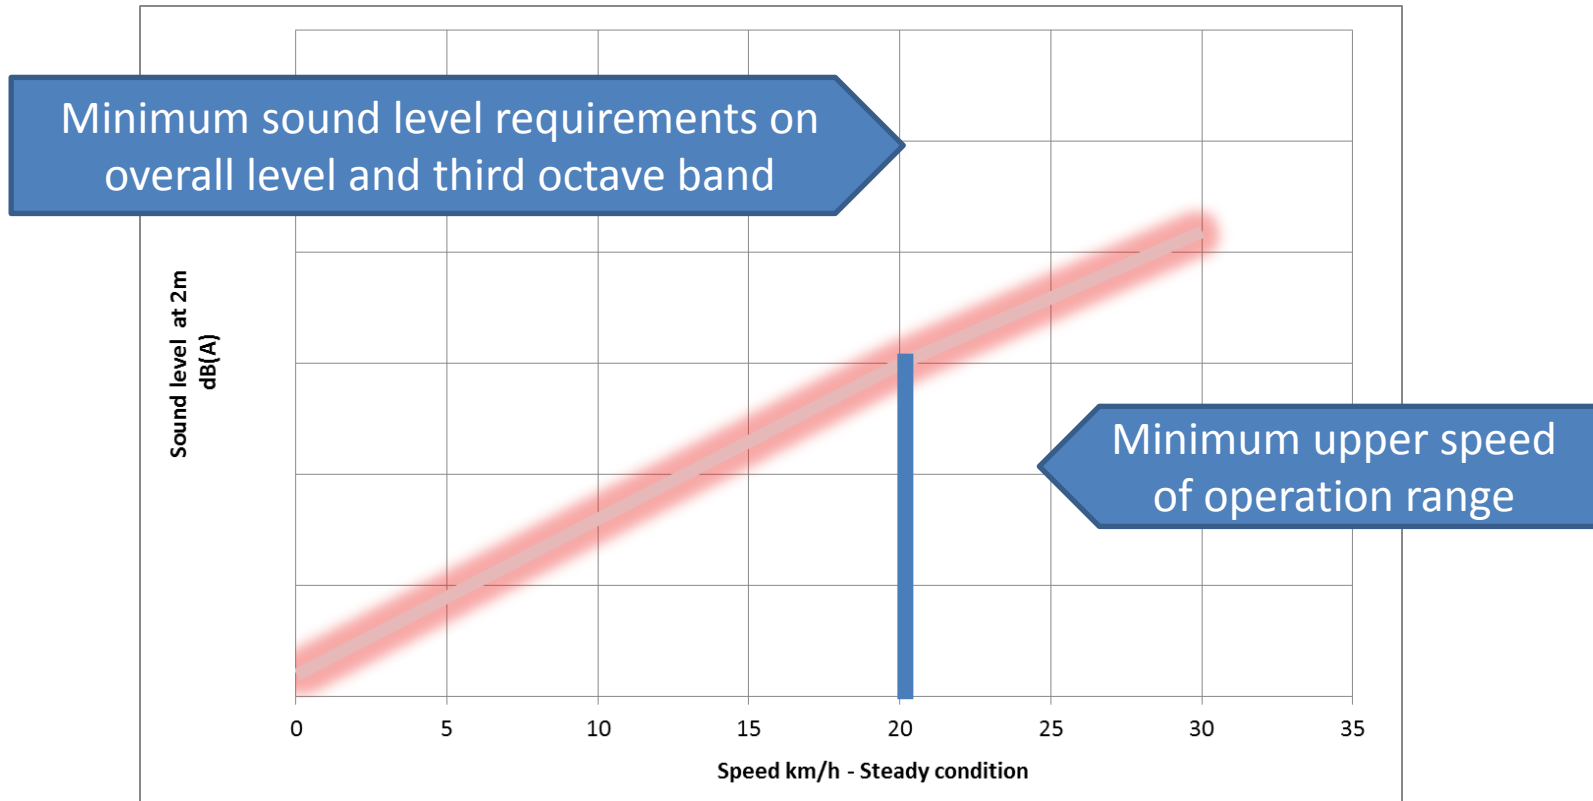

For vehicle equipped with AVAS in activation the difference between the minimum sound vehicle (overall level) and the red curve shall be less than xx dB.

Options for regions

- **Minimum sound level for Japan on :**
 - Overall level
 - At least one third octave band on “low frequency” range (below 800Hz) and one third octave band on “high frequency” range (above 1,25kHz)
- **Minimum sound level for US on :**
 - 8 third octave bands

Thank you for your attention