



Economic Commission for Europe

Inland Transport Committee

World Forum for Harmonization of Vehicle Regulations

194th session

Geneva, 12–15 November 2024

Item 4.12.3 of the provisional agenda

1958 Agreement:

Consideration of proposals for new UN Regulations submitted
by the Working Parties subsidiary to the World Forum

Proposal for a new UN Regulation on uniform provisions for the approval of Acceleration Control for Pedal Error (ACPE)

Submitted by the Working Party on Automated/Autonomous and Connected Vehicles*

The text reproduced below was adopted by the Working Party on Working Party on Automated/Autonomous and Connected Vehicles (GRVA) at its nineteenth session (ECE/TRANS/WP.29/GRVA/19, para. 58, based on ECE/TRANS/WP.29/GRVA/2024/24 (as amended by informal document GRVA-19-29). It is submitted to the World Forum for Harmonization of Vehicle Regulations (WP.29) and to the Administrative Committee (AC.1) for consideration at their November 2024 sessions.

This document revised based on the 00 series of ACPE regulation (WP.29/2024/154)
The results of 9th IWG show “Black Bold”.
The yellow highlight indicates that it was touched in 10th IWG, and red character means the amendment in 10th IWG.
Industry proposed amendment text

* In accordance with the programme of work of the Inland Transport Committee for 2024 as outlined in proposed programme budget for 2024 (A/78/6 (Sect. 20), table 20.5), the World Forum will develop, harmonize and update UN Regulations in order to enhance the performance of vehicles. The present document is submitted in conformity with that mandate.

UN Regulation No. [17X]

Uniform provisions concerning the approval of motor vehicles with regard to the Acceleration Control for Pedal Error (ACPE)

Contents

Regulation	<i>Page</i>
0. Introduction.....	3
1. Scope.....	4
2. Definitions	4
3. Application for approval	5
4. Approval	5
5. Specifications.....	6
6. Test procedure.....	10
7. Modification of vehicle type and extension of approval.....	12
8. Conformity of Production	13
9. Penalties for non-conformity of production.....	13
10. Production definitively discontinued	13
11. Names and addresses of Technical Services responsible for conducting approval tests and of Type Approval Authorities	13
Annexes	
1 Communication.....	14
2 Arrangements of approval marks.....	15
3 Special requirements to be applied to the safety aspects of electronic control systems	16
Appendix 1 - Model assessment form for electronic systems	21

0. Introduction

[Collisions caused by unintended acceleration resulting from a driver applying the accelerator pedal instead of the brake pedal have been seen to increase in recent years. The issue is particularly prevalent in vehicles with automatic transmission, including electric and hybrid vehicles, and is a more notable occurrence for the elderly. This Regulation provides internationally harmonised technical provisions for Accelerator Control for Pedal Error systems (ACPE), which aim to mitigate the consequences of such incidents.

ACPE limits the effect of an accelerator pedal application by the driver, and therefore it is important that systems only intervene in cases of genuine error. It is challenging to determine from accident data when misapplication of the accelerator pedal has occurred and therefore to define the characteristics of such incidents. Therefore, this initial phase of the Regulation has focused on those scenarios where it is most unambiguous that an error has occurred (i.e. when the vehicle is stationary and there is a clear obstruction present in the driving direction) and is closely aligned to the Japan New Car Assessment Program (JNCAP) protocol already established for assessing such systems.

The ACPE system must also be designed to accommodate any potential conflict with other systems, including Advanced Emergency Braking Systems (AEBS) - as regulated under UN Regulation No.152, whose purpose is to brake the vehicle when an imminent forward collision is detected. AEBS must provide a means for the driver to interrupt the system, for example by kick-down of the accelerator control. ACPE could misinterpret such a kick-down as a pedal confusion, resulting in a conflict between the two systems. This potential regulatory conflict is avoided in this initial phase of the Regulation by only considering the scenario of a stationary subject vehicle.

Some vehicle designs intended for very specific uses may jeopardise the functioning robustness of ACPE, for instance when some necessary equipment or design prevents the fitment of sensors in the required location. An example of such configuration is a vehicle adapted at the rear for wheelchair access. Where justified, and to the extent necessary, the Type Approval Authority may exempt such vehicles from some or all of the requirements, e.g. exemption from compliance with requirements in the rearward direction.

Statistics have shown that majority of pedal error incidents occur in M₁ category vehicles, so in the initial phase of the Regulation the development of requirements has focussed on these vehicles. However, incidents are also seen to occur in other categories of vehicle, and the technology as regulated here may also be beneficial for those vehicles. For that reason, it is permitted to approve vehicles other than Category M₁ at a manufacturer's request.

As ACPE is a driver assistance system, it is appropriate to provide a means of deactivation for those drivers who do not wish to use the system, or for situations where the vehicle is operated in a manner or environment likely to cause improper intervention of ACPE. A novel concept has been introduced in this regulation whereby long-term deactivation is permitted without continuous warning, but the vehicle user must be periodically informed that the system is available and deactivated. This is to reaffirm the choice of the driver or to ensure that other users of the vehicle (for example when it is changes ownership or if it is used by multiple drivers) are made aware of the status of the ACPE.

The accident data shows that pedal misapplication scenarios can vary widely from those which have been included for testing ACPE under this version of the Regulation. Therefore, a second phase **is was** looking to expand the situations where ACPE can provide benefit. These considerations **will cover led to** requirements and test procedures to address 'moving-off' and moving

vehicle scenarios (including addressing vehicles which ‘creep’ when the brake control is released), pedestrian scenarios, and For the inclusion of Category N₁ vehicles **the situation on potential pedal misapplication is ambiguous in some regions, the contracting parties are recommended to carry out an evaluation of the necessity of the applicability for this vehicle category in their region(s).**

Equally, the regulation could be updated in a subsequent phase to accommodate secondary collisions and higher speed, both when technical feasibility is confirmed.]

1. Scope

1.1. This UN Regulation applies to the type approval of vehicles of Category M₁¹ **and N₁** equipped with automatic transmission with regard to their Acceleration Control for Pedal Error systems (ACPE).

(a) **Acceleration Control for Pedal Error systems (ACPE) for a vehicle and wall.**

(b) **ACPE for a pedestrian.**

1.2. At the request of the manufacturer, vehicles of other categories may be approved under this Regulation.

1.3. Vehicles where installation of means of forward and/or rear detection is incompatible with their on-road use may be exempted from the relevant requirements (forward and/or rear direction) of this Regulation, subject to the decision of the Type Approval Authority.

1.4 Vehicles which are intended to be fitted by a company other than the vehicle manufacturer onto incomplete N1 vehicles are exempt from the rearward relevant requirements of this Regulation.

1.4 Vehicles fitted onto incomplete vehicles are exempt from the rearward relevant requirements of this regulation.

1.5 N1 vehicle types for special purposes (e.g. on construction sites) whose shape or characteristics (e.g. angle of departure) impede the functionality or mounting of ACPE-necessary sensors, can be exempted from this regulation.

コメントの追加 [KK(賢1): Industry; modify wording. Not change the meaning.]

2. Definitions

For the purposes of this Regulation:

2.1. “*Acceleration Control for Pedal Error (ACPE)*” means a system to detect misapplication of the accelerator control by the driver and to control unintended acceleration.

2.2. “*Vehicle Type with Regard to its ACPE*” means a category of vehicles which do not differ in such essential aspects as:

(a) Vehicle features which significantly influence the performances of ACPE;

(b) The type and design of ACPE.

2.3. “*Common space*” means an area on which two or more information functions (e.g. symbol) may be displayed but not simultaneously.

¹ As defined in the Consolidated Resolution on the Construction of Vehicles (R.E.3.), document ECE/TRANS/WP.29/78/Rev.6, para. 2 - www.unece.org/trans/main/wp29/wp29wgs/wp29gen/wp29resolutions.html

- 2.4. "Dry road affording good adhesion" means a road with a sufficient nominal Peak Braking Coefficient (PBC) that would permit:
- (a) A mean fully developed deceleration of at least 9 m/s²; or
 - (b) The design maximum deceleration of the relevant vehicle;
- whichever is lower.
- 2.5. "Sufficient nominal Peak Braking Coefficient (PBC)" means a road surface friction coefficient of:
- (a) 0.9, when measured using the American Society for Testing and Materials (ASTM) of E1136-19 standard reference test tyre in accordance with ASTM Method E1337-19 at a speed of 40 mph;
 - (b) 1.017, when measured using either:
 - (i) The American Society for Testing and Materials (ASTM) of F2493-20 standard reference test tyre in accordance with ASTM Method E1337-19 at a speed of 40 mph; or
 - (ii) The k-test method specified in Appendix 2 to Annex 6 of UN Regulation No. 13-H.
 - (c) The required value to permit the design maximum deceleration of the relevant vehicle, when measured using the k-test method in Appendix 2 to Annex 13 of UN Regulation No. 13.
- 2.6. "Self-check" means an integrated function that checks for a system failure on a continuous basis at least while the system is active.
- 2.7. "Obstacle" means either a vehicle, or a wall-like structure **or a pedestrian**.
- 2.8. "Automatic Transmission" means any transmission which does not require the use of a clutch control by the driver in order to shift gears (automatic transmissions include e.g. single gear transmissions, continuously-variable transmissions, transmissions with an automated clutch).
- 2.9. "Mass of a vehicle in running order" means the mass of an unladen vehicle with bodywork, including coolant, oils, at least 90 per cent of fuel, 100 per cent of other liquids, driver (75 kg) but except used waters, tools, spare wheel.
- 2.10. "Extreme outer edge" on either side of the vehicle, means the plane parallel to the median longitudinal plane of the vehicle and touching its lateral outer edge, disregarding the projection:
- Of tyres near their point of contact with the ground, and of connections for tyre-pressure gauges;
 - Of any anti-skid devices mounted on the wheels;
 - Of devices for indirect vision;
 - Of side direction-indicator lamps, end-outline marker lamps, front and rear position lamps, parking lamps, retro-reflectors and side-marker lamps
- 2.11. "Overall width" means the distance between the two vertical planes defined in paragraph 2.10.]
- 2.12. "Moving off" means starting from stationary and moving forward or rearward after releasing the brakes.
- 2.13. "Creeping [off]" means the state of motion ~~which the vehicle is in [for two or three seconds] after releasing the brakes from standstill, with the vehicle powertrain operating at idle, when there is no input to the acceleration or braking demand control from the driver, and the drivetrain(s) or power transmission system is engaged [, and the vehicle speed is below 4 km/h the minimum AEBS activation speed as defined by the manufacturer, if the vehicle is fitted with an AEBS];~~

2.13 "Creeping" means state of motion of the vehicle between standstill and the steady state which the vehicle reaches when there is no input to the acceleration control or brake control from the driver, and the drivetrain(s) or power transmission system is engaged

2.13 "Creeping" means the state of motion on a horizontal surface with the powertrain engaged and operating at idle, and no acceleration or brake demand.

2.13.1. "Creeping Speed" means any speed the vehicle achieves adjusts whilst creeping on a horizontal surface.

2.13 "Creeping" means the state of motion with any creeping speed on a horizontal surface with the powertrain engaged and operating at idle, and no acceleration or brake demand.

2.13.1. "Creeping Speed" means any speed, up to steady state, the vehicle achieves adjusts whilst creeping on a horizontal surface.

3. Application for approval

- 3.1. The application for approval of a vehicle type with regard to the ACPE shall be submitted by the vehicle manufacturer or by his authorized representative.
- 3.2. It shall be accompanied by the documents mentioned below in triplicate:
- 3.3. A description of the vehicle type with regard to the items mentioned in paragraph 2.2., together with a documentation package which gives access to the basic design of the ACPE and the means by which it is linked to other vehicle systems or by which it directly controls output variables. The numbers and/or symbols identifying the vehicle type shall be specified.
- 3.4. A vehicle representative of the vehicle type to be approved shall be submitted to the Technical Service conducting the approval tests.

4. Approval

- 4.1. If the vehicle type submitted for approval pursuant to this Regulation meets the requirements of paragraph 5. below, approval of that vehicle type shall be granted.
- 4.2. An approval number shall be assigned to each vehicle type approved; its first two digits (00 for the Regulation in its initial form) shall indicate the series of amendments incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval. The same Contracting Party shall not assign the same number to the same vehicle type equipped with another type of ACPE, or to another vehicle type.
- 4.3. Notice of approval or of refusal or withdrawal of approval pursuant to this Regulation shall be communicated to the Parties to the Agreement applying this Regulation by means of a form conforming to the model in Annex 1 and photographs and/or plans supplied by the applicant being in a format not exceeding A4 (210 x 297 mm), or folded to that format, and on an appropriate scale.

- 4.4. There shall be affixed, conspicuously and in a readily accessible place specified on the approval form, to every vehicle conforming to a vehicle type approved under this Regulation, an international approval mark conforming to the model described in Annex2, consisting of:
- 4.4.1. A circle surrounding the letter "E" followed by the distinguishing number of the country which has granted approval²;
- 4.4.2. The number of this Regulation, followed by the letter "R", a dash and the approval number to the right of the circle prescribed in paragraph 4.4.1. above.
- 4.5. If the vehicle conforms to a vehicle type approved under one or more other Regulations annexed to the Agreement, in the country which has granted approval under this Regulation, the symbol prescribed in paragraph 4.4.1. above need not be repeated; in such a case, the Regulation and approval numbers and the additional symbols shall be placed in vertical columns to the right of the symbol prescribed in paragraph 4.4.1. above.
- 4.6. The approval mark shall be clearly legible and be indelible.
- 4.7. The approval mark shall be placed close to or on the vehicle data plate.

5. Specifications

5.1. Performance Requirements

The following performance requirements shall apply to a vehicle with no trailer coupled, with a mass between maximum mass and mass in running order, and whose powertrain management system is properly operational.

- 5.1.1. The ACPE shall be able to limit unintended acceleration of the vehicle when an accelerator control misapplication by the driver has been detected at least:
- (a) When an obstacle exists in front of the vehicle when the driving direction is selected to be forward, and
- (b) When an obstacle exists behind the vehicle when the driving direction is selected to be rearwards.

5.1.2. An accelerator control application having a velocity of at least 400 per cent per second over a travel distance of at least 70 per cent of the total travel distance of the accelerator control, and reaching a maximum position of the accelerator control of at least 90 per cent, **with that velocity within the above 70 per cent travel shall be regarded as an accelerator control misapplication in the context of the paragraph 5.1.1.**

5.1.3. Notwithstanding paragraph 5.1.2., in the case of systems that implement force-based triggering of the ACPE, an accelerator control force greater than the triggering threshold shall be considered as accelerator control misapplication. The manufacturer shall justify the triggering threshold to the satisfaction of the Type Approval Authority.

5.1.4. **The ACPE shall control acceleration when the vehicle is accelerated both from standstill. and, as relevant, while creeping ~~{off}~~.**

[An ACPE intervention shall is not be required when there is an AEB warning or intervention occurring as defined in Regulation (UN) No. 152 in any series of amendments]

If ACPE is not ready to perform an intervention 6 s after the initiation of the vehicle powertrain, information of this status shall be indicated to the

² The distinguishing numbers of the Contracting Parties to the 1958 Agreement are reproduced in Annex 3 to the Consolidated Resolution on the Construction of Vehicles (R.E.3), document ECE/TRANS/WP.29/78/Rev.6, Annex 3 - www.unece.org/trans/main/wp29/wp29wgs/wp29gen/wp29resolutions.html

driver. This information shall exist until the system has been successfully initialised.

5.1.5.

The ACPE shall limit vehicle acceleration in order to prevent or mitigate a collision with an obstacle located between **1.0 m and 1.5 m** in front of or behind the vehicle, in the vehicle path, at the time the accelerator control is applied, **if operating range changes depending on the creeping speed, it shall be explained to Technical Service in Annex 3,** provided:

- (a) Vehicle external influences allow for the required acceleration inhibition, i.e.:
- (i) The road is flat, horizontal and dry affording good adhesion;
 - (ii) The weather conditions do not affect the performance of the vehicle (e.g. no storm, not below 0°C);
- (b) The vehicle state itself allows for the required acceleration inhibition, e.g.:
- (i) The tyres are in an appropriate state and properly inflated;
 - (ii) The brakes if intended to be used are properly operational (brake temperature, pads condition etc.);
 - (iii) There is no severe uneven load distribution;
 - (iv) No trailer is coupled to the motor vehicle and the mass of the motor vehicle is between maximum mass and mass in running order conditions;
 - (v) The vehicle's powertrain management system is properly operational

vi) If the vehicle is equipped with rear hatches, trunk lids or tailgates, they are closed and latched in the normal conditions of vehicle operation.

- (c) There are no external influences affecting the physical sensing capabilities, i.e.:
- (i) The ambient illumination conditions are at least 1000 Lux and there is no extreme blinding of the sensors (e.g. direct blinding sunlight, highly radar-reflective environment);
 - (ii) The target vehicle is not extreme with regard to the Radar Cross Section (RCS) or the shape/silhouette (e.g. below fifth percentile of RCS of all M₁ vehicles)
 - (iii) There are no significant weather conditions affecting the sensing capabilities of the vehicle (e.g. heavy rain, dense fog, snow, dirt);
 - (iv) There are no overhead obstructions close to the vehicle;
- (d) The situation is unambiguous, i.e.:

(i) The obstacle is stationary, unobstructed, clearly separated from other objects in the driving direction;

(ii) In the case of a vehicle-or-wall-obstacle, The lateral offset between the centreline of the obstacle and the centreline of the vehicle is not more than 0.2 m the centre line of the obstacle is located between two vertical longitudinal planes defining the extreme outer edge of the vehicle.

(iii) In the case of a wall obstacle, the overlap between wall and vehicle is at least 1.0 m.

(iv) In the case of a pedestrian obstacle, the distance between the centre line of the pedestrian obstacle and the centre line of the vehicle is not more than 25% of the vehicle width ~~obstacle~~ pedestrian obstacle is

コメントの追加 [KK(賢2): Industry : Depending on the creep speed, the effect may not be expected at the 1.0m point.

コメントの追加 [KK(賢3): Industry: Align R158 amendment text (128th GRSG: GRSG-128-35)

located between two vertical longitudinal planes which are 0.1m within the extreme outer edge of the vehicle.

(iiiiv) The direction of travel is straight with no curve, and the vehicle is not turning at an intersection and following its lane.

(ivvi) The obstacle is a vehicle of category M₁, or a wall like structure with a width of at least 2.0 m and a height of at least 1.0 m- **or a silhouette of a pedestrian that relates to a human being.**

When conditions deviate from those listed above, the system shall not deactivate or unreasonably switch the control strategy. This shall be demonstrated by the manufacturer in accordance with Annex 3 of this Regulation and, if deemed justified, may be followed by testing by the Technical Service in conditions deviating from those listed above or those in paragraph 6. The rationale for and the results of this verification testing shall be appended to the test report.

5.1.6. In case of acceleration from standstill,

In the case that a collision is not prevented, the collision speed shall be no greater than 8 km/h higher than the vehicle speed at the point where the triggering conditions specified in paragraph 5.1.2. are met.

In addition, the collision speed shall not be greater than 70% of that speed the vehicle would have had in the same position and under the same circumstances but without any ACPE intervention.

5.1.6.1. In case of acceleration from standstill,

In the case of vehicles that do not exceed 8 km/h without ACPE in the test scenarios but for which a speed reduction of 30 per cent cannot be achieved due to a low engine power to test mass ratio, the speed reduction shall be of at least 15 per cent.

5.1.6.2 In case of acceleration while creeping,

ACPE acceleration suppression control shall be conducted at least at the point of the 1.5m obstacle.

5.1.7. During any intervention, the vehicle acceleration shall continue to be limited by the ACPE. The intervention may be ended when the obstacle is no longer detected, or the driver has interrupted the function. The Manufacturer shall declare the ACPE continuation conditions to the technical service.

5.1.8. The effectiveness of ACPE shall not be adversely affected by magnetic or electrical fields. This shall be demonstrated by fulfilling the technical requirements and respecting the transitional provisions of the 06 or later series of amendments to UN Regulation No. 10.

5.1.9. Conformity with the safety aspects of electronic control systems shall be shown by meeting the requirements of Annex 3.

5.1.10. The ACPE shall inform the driver of its intervention in accordance with paragraph 5.4.2.

5.1.11. Interruption of ACPE by driver

5.1.11.1. The ACPE shall provide a means for the driver to interrupt its intervention. This interruption shall be started by any intentional action which indicates that the driver has recognised the situation.

5.1.11.2. In the case of interruption by maintaining the accelerator control application, there shall be no rapid increase of acceleration.

5.1.11.3. The fulfilment of these requirements shall be documented and demonstrated by the manufacturer to the Approval Authority during the inspection of the safety concept as part of the assessment to Annex 3.

コメントの追加 [KK(賢4): Industry ; To divide "from standstill test" and "from creeping test"]

- 5.1.12. The performance requirements shall be verified using the test procedure as described in section ~~6.6.1 and 6.6.2~~.
- 5.2. Deactivation
- 5.2.1. Short term deactivation
- When a vehicle is equipped with a means to manually deactivate the ACPE, the ACPE shall be automatically reinstated at the initiation of any new engine start (or run cycle, as relevant).
- This requirement does not apply when a new engine start (or run cycle, as relevant) is performed automatically, e.g., the operation of a stop/start system.
- A deactivation warning shall be given at least at the time of deactivation.
- 5.2.2. Long term deactivation
- Notwithstanding paragraph 5.2.1., a vehicle may be equipped with a long term deactivation means to manually deactivate the ACPE, in that case, the system is not required to be reinstated at the initiation of each engine start (or run cycle, as relevant). However, the system shall provide information to the driver by either (a), (b) or (c):
- (a) A constant optical warning signal shall inform the driver that the ACPE has been deactivated. The yellow warning signal specified in paragraph 5.4.3. may be used for this purpose;
- (b) The driver shall be periodically informed that the ACPE has been deactivated. In this case this information shall be given for a minimum of 10 seconds or until driver confirmation.
- This information shall be given at least either every 7 days or every 10 engine starts (or run cycles, as relevant), not counting when a new engine start (or run cycle, as relevant) is performed automatically, e.g. the operation of a stop/start system. This information shall be distinct from the failure warning signal specified in paragraph 5.4.3.;
- or
- (c) If deactivation is only for one direction of operation (forward or rearwards), **as an alternative to (a) or (b)**, a constant optical warning shall be given when the corresponding driving direction is selected for **the first time following each initiation of the powertrain. The warning shall remain at least until the driving direction is changed.** ~~in the engine start cycle (or run cycle, as relevant).~~
- The long-term deactivation process shall be designed in such a way that deactivation shall not be possible with less than 2 deliberate actions.
- 5.2.3. Automatic deactivation
- 5.2.3.1. When the vehicle is equipped with a means to automatically deactivate the ACPE, for instance in situations such as carrying a bicycle rack or towing a trailer, the following conditions shall apply as appropriate:
- 5.2.3.1.1. The vehicle manufacturer shall provide a list of situations and corresponding criteria where the ACPE is automatically deactivated to the technical service at the time of type-approval and it shall be annexed to the test report.
- 5.2.3.1.2. The ACPE shall be automatically reactivated as soon as the conditions that led to the automatic deactivation are not present anymore.
- 5.2.3.1.3. A deactivation warning shall be given at least at the time of deactivation unless a failure warning is given as per paragraph 5.3.3.
- 5.2.3.1.3.1. **While an Automated Driving System, which allows a driver override, is in control of the vehicle, or an Advanced Driver Assistance System is in active mode (e.g. ALKS or ACSF category A is active), the ACPE may be suspended or its control strategies adapted without indication to the driver, as long as the**

コメントの追加 [KK(賢5): Industry : to correct numbering]

risks of pedal misapplication remain mitigated to the same degree as provided by ACPE. it remains ensured that the vehicle provides at least the same acceleration suppression capabilities as the ACPE. The suspension of the ACPE or the adapted control strategies shall be documented and demonstrated by the manufacturer to the Approval Authority during the inspection of the safety concept as part of the assessment to Annex 3.

- 5.3. Failure detection / self-check
 - 5.3.1. A failure warning shall be given to the driver when there is a failure in the ACPE that prevents the requirements of this Regulation being met. The warning shall be as specified in paragraph 5.4.3.
 - 5.3.1.1. It is not required to provide the driver with a failure warning signal to indicate that the ACPE is temporarily not available, for example due to inclement weather conditions.
 - 5.3.2. There shall not be an appreciable time interval between each ACPE self-check, and subsequently there shall not be a delay in illuminating the warning signal, in the case of an electrically detectable failure. However, if the vehicle speed is greater than 10 km/h at the time a failure is detected, the warning signal may be suppressed until the next time the vehicle speed is below 10 km/h.
 - 5.3.3. A failure warning shall also be given to the driver in the case of a detected non-electrical failure condition (e.g. sensor blindness or sensor misalignment) unless a deactivation warning is given as per paragraph 5.2.3.1.3.
 - 5.4. Warning signals
 - 5.4.1. General
 - 5.4.1.1. The optical warning signals shall be visible even by daylight; the satisfactory condition of the signals must be easily verifiable by the driver from the driver's seat.
 - 5.4.1.2. Each ACPE optical warning signal shall be activated either when the engine start (or run, as relevant) switch is turned to the "on" (run) position or when the engine start (or run, as relevant) switch is in a position between the "on" (run) and "start" position that is designated by the manufacturer as a check position (initial system (power-on)). This requirement does not apply to warning signals shown in a common space.
 - 5.4.2. Intervention warning signal

An intervention warning shall be given by an optical signal. In addition, a haptic or acoustic signal shall be provided to the driver, unless such a signal is already being provided by another vehicle system comprising an object detection capability (e.g. parking distance warning).

The optical warning signal may be the flashing of the failure warning signal.

A description of the warning indication presented to the driver shall be provided by the vehicle manufacturer at the time of type-approval and recorded in the test report.
 - 5.4.3. Failure warning signal

The failure warning shall be given by a constant yellow optical signal.
 - 5.5. Provisions for the Periodic Technical Inspection
 - 5.5.1. At a Periodic Technical Inspection, it shall be possible to confirm the correct operational status of the ACPE by a visible observation of the failure warning signal status. Following a "power-ON" and any bulb check, the failure warning signal shall remain illuminated if any failure was present at the end of the previous engine start (or run, as relevant) cycle, unless this failure is detected to be no longer present.

In the case of the failure warning signal being in a common space, the common space must be observed to be functional prior to the failure warning signal status check.

- 5.5.2. At the time of type approval, the means to protect against simple unauthorised modification of the operation of the failure warning signal chosen by the manufacturer shall be confidentially outlined.

Alternatively, this protection requirement is fulfilled when a secondary means of checking the correct operational status of the ACPE is available.

6. Test procedure

- 6.1. Test surface and environment conditions

6.1.1. The test shall be performed on a flat, dry, concrete or asphalt road affording good adhesion.

6.1.2. The test surface has a consistent slope between level and 1 per cent.

6.1.3. The ambient temperature shall be between 0°C and 45°C.

6.1.4. The horizontal visibility range shall allow the target to be observed throughout the test.

6.1.5. The tests shall be performed when there is no wind liable to affect the results.

6.1.6. Natural ambient illumination must be homogeneous in the test area and in excess of 1000 lux. It should be ensured that testing is not performed whilst driving towards, or away from the sun at a low angle.

6.1.7. At the request of the manufacturer and with the agreement of the Technical Service tests may be conducted under deviating test conditions (suboptimal conditions, e.g. on a not dry surface; below the specified minimum ambient temperature), whilst the performance requirements are still to be met.

- 6.2. Instrumentation

6.2.1. The speed of the vehicle shall be measured with an accuracy of +/- 0.1 km/h.

6.2.2. The position of the vehicle shall be measured with an accuracy of +/- 0.03 m.

6.2.3. The accelerator control force (if applicable) shall be measured with an accuracy of +/- 1 N.

6.2.4. The accelerator control position shall be measured with an accuracy of +/- 1%. Alternatively, at the choice of the manufacturer, this measurement may be taken from the vehicle's own position sensor.

6.2.5. Measurements shall be recorded at a frequency of at least 100 Hz.

- 6.3. Test Vehicle

- 6.3.1. Pre-Test Conditioning

If requested by the vehicle manufacturer:

(a) The vehicle can be driven a maximum of 100 km on a mixture of urban and rural roads with other traffic and roadside furniture to initialise the sensor system.

(b) The vehicle can undergo a sequence of brake activations in order to ensure the service brake system is bedded in prior to the test.

Details of the pre-test condition strategy requested by the vehicle manufacturer shall be identified and recorded in the vehicle type approval documentation.

- 6.3.2. Prior to any testing, it shall be ensured that the ACPE is switched on and ready to function.

During the conduct of the test the T.S. need to ensure that the boundary conditions of the ACPE - as defined by the manufacturer - wrt. to the detection of the test target are taken into account (e.g. avoid blocking of a sonar system used, ensure that a vision system used can properly identify the pedestrian test target used as a human by making it fully visible to the camera system before testing, etc.)

6.3.3. Test mass

The vehicle shall be tested:

- (a) At the minimum mass (mass in running order with an additional mass of maximum 125 kg);
- (b) If this is deemed justified, the technical service may test at any other mass up to the technically permissible maximum laden mass as defined by the manufacturer. No alteration shall be made once the test procedure has begun.

6.4. Test Targets

6.4.1. The target used for the vehicle detection tests shall be a regular high-volume series production passenger car of Category M₁ or alternatively a "soft target" representative of a passenger vehicle in terms of its identification characteristics applicable to the sensor system of the ACPE under test according to either ISO 19206-1:2018 or ISO 19206-3:2021 at the choice of the manufacturer.

6.4.2. The targets used for the pedestrian detection tests shall be a child articulated "soft target" in its resting position with the articulation being switched off and be representative of the human attributes applicable to the sensor system of the ACPE under test according to ISO 19206-2:2018.

6.5. Accelerator control misapplication test Offset of vehicle and target

6.5.1. The reference point for the location of the vehicle shall be the most rearward point on the centreline of the vehicle when going rearwards, and the most forward point of the vehicle when going forwards.

6.5.2. The lateral offset between the centreline of the ~~wall or~~ vehicle target and the centreline of the vehicle shall be between 0.0 m and 0.2 m the distance to extreme outer edge of the vehicle.

6.5.3. ~~The lateral offset between the centreline of the pedestrian target and the extreme outer edge of the vehicle shall be at least 0.25m.~~

The lateral offset between the centre line of the pedestrian obstacle and the centre line of the vehicle is not more than 25% of the vehicle width

6.5.4. The orientation of the pedestrian target is to be determined by the technical service

6.5.5. The orientation of the vehicle target shall be 0° or 180° respectively as defined in ISO 19206-3:2021, chosen by the technical service.

The test procedure shall be as follows:

6.6. Test procedures for a stationary vehicle

6.6.1. The test procedures ~~for a stationary vehicle~~ shall be performed with and without an ~~expected~~ ACPE intervention both in a forward and rearward direction and at least with the ~~vehicle-situated ACPE interventions triggered in~~ 1.0 m (+0.1 m tolerance) and 1.5 m (-0.1 m tolerance) ~~distance~~ from the target position at the start of the test (as detailed in Table 1).

Table 1

Test conditions ~~for a stationary vehicle.~~

コメントの追加 [KK(實6): Industry : Delete "wall". Because this is test section.

コメントの追加 [KK(實7): Industry : To reflect 5.1.5 (d) iv)

Driving direction	Distance to target /		Tolerance on the longitudinal distance (m)	Tolerance on the lateral (offset) distance (m)	Presence of target
	Distance to speed measuring point (m)				
Forward	1.0		+ 0.1	+/- 0.2	Yes
Forward	1.0		+ 0.1	N/A	No *
Forward	1.5		-0.1	+/- 0.2	Yes
Forward	1.5		-0.1	N/A	No *
Rearward	1.0		+ 0.1	+/- 0.2	Yes
Rearward	1.0		+ 0.1	N/A	No **
Rearward	1.5		-0.1	+/- 0.2	Yes
Rearward	1.5		-0.1	N/A	No **

Presence of target:
 Yes : with ACPE intervention
 No : without ACPE intervention or with ACPE deactivation
 * These tests may be combined
 ** These tests may be combined

6.6.1.2 The procedure for each test with a stationary (non creeping) vehicle shall be as follows:

- (a) Position the vehicle at a distance to the target or speed measurement point as defined in Table 1.
- (b) Hold the vehicle stationary and select the corresponding driving direction.
- (c) Accelerate the vehicle, whilst maintaining the steering control in the neutral position, by operating the accelerator control in order to achieve the relevant triggering conditions (as outlined in paragraph 5.1.2.) before the vehicle reaches a speed of 0.5 km/h.
- (d) Record the speed at the collision point (if applicable) or the speed at the respective speed measurement point.

Before any test is started the vehicle may be driven in the direction of the target for a distance of up to 20 m to the start position and/or the engine may be switched “off” and “on”, if requested by the manufacturer.

6.6.2.7 Test procedure for a creeping vehicle

Each test condition according to Table 1 shall be tested once with a creeping speed at the discretion of the Technical Service. The creeping speed should be selected such that an ACPE intervention is expected and not suppressed due to an AEBS intervention.

The recorded creeping speeds with and without the presence of a target (according to subbullet (e)) shall not deviate by more than [0,x] km/h in order to assess the test as valid.

- (a) Position the vehicle at an appropriate distance to reach a creeping speed at the relevant distance to target / distance to speed measuring point according to Table 1.
- (b) Hold the vehicle stationary and select the corresponding driving direction.
- (c) Release the braking system so that the vehicle starts creeping.
- (d) Operate the accelerator control in order to achieve the relevant triggering conditions (as outlined in paragraph 5.1.2.) once the vehicle has reached the distance to target / the speed measurement point.

コメントの追加 [KK(資8): Industry: Propose to add for clarification]

(e) Record the creeping speed at the triggering point of the ACPE (as outlined in paragraph 5.1.2.) and the speed at the collision point (if applicable) or the speed at the respective speed measurement point.

6.7.1. The following procedures shall be conducted in both a forward and rearward direction for those vehicles that can creep.

6.7.2. Speed profile without presence of target and no expected ACPE intervention

6.7.2.1. No target should be present and, if necessary, the ACPE should be switched off.

6.7.2.2. The vehicle shall be driven in a straight line for at least 2m at its steady state creep speed.

6.7.2.3. The vehicle shall then be accelerated, whilst maintaining the steering control in the neutral position, by operating the accelerator control in order to achieve the relevant triggering conditions (as outlined in paragraph 5.1.2.). The point at which the accelerator control is actuated shall be defined as the reference accelerator application point.

6.7.2.4. The speed of the vehicle shall be recorded for a distance of at least 1.5m from the reference accelerator application point.

6.7.2.5. At the request of the manufacturer and notwithstanding paragraph 6.7.2.2., for vehicles which reach steady state creep speed above 9km/h, the vehicle shall be accelerated as per paragraph 6.7.2.3. as soon as the vehicle reaches 9km/h.

6.7.3. Speed profile with presence of target

6.7.3.1. The vehicle shall be positioned, with the ACPE switched on (if necessary), at a distance from the target such that its speed will have reached a steady state creep speed at least 3.5m before the target.

6.7.3.2. The vehicle shall be held stationary and the corresponding driving direction selected.

6.7.3.3. The brakes shall then be released and the vehicle allowed to creep in the direction of the target until it reaches a distance of between 1.0m to 1.5m from the target.

6.7.3.4. The vehicle shall then be accelerated, whilst maintaining the steering control in the neutral position, by operating the accelerator control in order to achieve the relevant triggering conditions (as outlined in paragraph 5.1.2.). The point at which the accelerator control is actuated shall be defined as the test accelerator application point.

6.7.3.5. At the test accelerator application point and up until the potential collision point the target shall have a position according to paragraph 6.5.

6.7.3.6. The speed of the vehicle shall be recorded at the point of collision with the target as well as the distance travelled from the test accelerator application point.

6.7.3.7. If paragraph 6.7.2.5. is applicable then the starting position in paragraph 6.7.3.2. shall be such that the vehicle speed is 9km/h at the test accelerator application point.

6.7.4. Evaluation of speed profiles

6.7.4.1. The speed of the vehicle at the point of collision (paragraph 6.7.3.6.) shall be evaluated against speed recorded under paragraph 6.7.2.4. at the distance from the reference accelerator application point which is the same as the distance travelled from the test accelerator application point to the point of collision.

- 6.6.17. If this is deemed justified, the Technical Service may test in any test condition within the conditions specified in paragraph 5.1. during the tests as described in paragraph 6.5., e.g. testing a creeping vehicle also according to section 6.6.1.

7. Modification of vehicle type and extension of approval

- 7.1. Every modification of the vehicle type as defined in paragraph 2.2. above shall be notified to the Type Approval Authority which approved the vehicle type. The Type Approval Authority may then either:
- 7.1.1. Consider that the modifications made do not have an adverse effect on the conditions of the granting of the approval and grant an extension of approval;
- 7.1.2. Consider that the modifications made affect the conditions of the granting of the approval and require further tests or additional checks before granting an extension of approval.
- 7.2. Confirmation or refusal of approval, specifying the alterations, shall be communicated by the procedure specified in paragraph 4.3. above to the Contracting Parties to the Agreement which apply this Regulation.
- 7.3. The Type Approval Authority shall inform the other Contracting Parties of the extension by means of the communication form which appears in Annex 1 to this Regulation. It shall assign a serial number to each extension to be known as the extension number.

8. Conformity of production

- 8.1. Procedures concerning conformity of production shall comply with those set out in the 1958 Agreement, Schedule 1 (E/ECE/TRANS/505/Rev.3) and meet the following requirements:
- 8.2. A vehicle approved pursuant to this Regulation shall be so manufactured as to conform to the type approved by meeting the requirements of paragraph 5. above;
- 8.3. The Type Approval Authority which has granted approval may at any time verify the conformity of control methods applicable to each production unit. The normal frequency of such inspections shall be once every two years.

9. Penalties for non-conformity of production

- 9.1. The approval granted in respect of a vehicle type pursuant to this Regulation may be withdrawn if the requirements laid down in paragraph 8, above are not complied with.
- 9.2. If a Contracting Party withdraws an approval it had previously granted, it shall forthwith so notify the other Contracting Parties applying this Regulation by sending them a communication form conforming to the model in Annex 1 to this Regulation.

10. Names and Addresses of Technical Series Responsible for Conducting Approval Tests and of Type Approval Authorities

If the holder of the approval completely ceases to manufacture a type of vehicle approved in accordance with this Regulation, he shall so inform the

Type Approval Authority which granted the approval, which in turn shall forthwith inform the other Contracting Parties to the Agreement applying this Regulation by means of a communication form conforming to the model in Annex 1 to this Regulation.

11. Names and addresses of the Technical Services responsible for conducting approval tests and of Type Approval Authorities

The Contracting Parties to the Agreement applying this Regulation shall communicate to the United Nations Secretariat³ the names and addresses of the Technical Services responsible for conducting approval tests and of the Type Approval Authorities which grant approval and to which forms certifying approval or extension or refusal or withdrawal of approval are to be sent.

12. Transitional provisions

12.1. Transitional provisions applicable to the 01 series of amendments

12.1.1. As from the official date of entry into force of the 01 series of amendments, no Contracting Party applying this Regulation shall refuse to grant or refuse to accept type approvals under this Regulation as amended by the 01 series of amendments.

12.1.2. As from [1 January 2028 / 1 June September 2030 / 1 September 2029], Contracting Parties applying this Regulation shall not be obliged to accept type approvals to the original version of this Regulation, first issued after [1 January 2028 / 1 June September 2030 / 1 September 2029].

September 12.1.3. Until [1 January 2030 / 1 June September 2032 / 1 September 2031], Contracting Parties applying this Regulation shall accept type approvals to the original version of this Regulation, first issued before [1 January 2028 / 1 June September 2030 / 1 September 2031].

12.1.4. As from [1 January 2030 / 1 June September 2032 / 1 September 2031], Contracting Parties applying this Regulation shall not be obliged to accept type approvals issued to the original version of this Regulation.

12.1.5. Notwithstanding paragraph 12.1.4., Contracting Parties applying this Regulation shall continue to accept type approvals issued according to the original version of this Regulation, for vehicles which are not affected by the changes introduced by the 01 Series of amendments.

12.1.6. Notwithstanding the transitional provisions above, Contracting Parties who start to apply this Regulation after the date of entry into force of the most recent series of amendments are not obliged to accept type approvals which were granted in accordance with any of the preceding series of amendments to this Regulation / are only obliged to accept type approval granted in accordance with the 00 series of amendments.

12.1.7. Contracting Parties applying this Regulation may grant type approvals according to any preceding series of amendments to this Regulation.

12.1.8. Contracting Parties applying this Regulation shall continue to grant extensions of existing approvals to any preceding series of amendments to this Regulation.

コメントの追加 [KK(賛9): Industry ; To align transitional provisions guideline (WP29-192-15)]

コメントの追加 [KK(賛10): Industry : same above]

コメントの追加 [KK(賛11): Industry : same above]

コメントの追加 [KK(賛12): Industry : same above]

コメントの追加 [KK(賛13): Industry : same above]

コメントの追加 [KK(賛14): Industry ; To align transitional provisions guideline (WP29-192-15)]

³ The UNECE secretariats provides the online platform ("343 Application") for exchange of such information with the secretariat: <https://www.unece.org/trans/main/wp29/datasaring.html>

Annex 1

Communication

(Maximum format: A4 (210 x 297 mm))



issued by : (Name of administration)

.....
.....
.....

- ⁴Concerning: ⁵
- Approval granted
 - Approval extended
 - Approval refused
 - Approval withdrawn
 - Production definitively discontinued

of a type of vehicle with regard to its Acceleration Control for Pedal Error pursuant to UN Regulation No. [17X]

Approval No.:

1. Trademark:
2. Type and trade name(s):
3. Name and address of manufacturer:
4. If applicable, name and address of manufacturer's representative:
5. Brief description of vehicle type:
6. Vehicle is equipped with ACPE which has been exempted from the relevant requirements (forward and/or rear direction) of this Regulation: yes/no
- 6.1. If yes, details:
 7. Date of submission of vehicle for approval:
 8. Technical Service performing the approval tests:
 9. Date of report issued by that Service:
 10. Number of report issued by that Service:
 11. Approval granted/refused/extended/withdrawn:²
 12. Place:
 13. Date:
 14. Signature:
15. Annexed to this communication are the following documents, bearing the approval number indicated above:
16. Any remarks:


⁴ Distinguishing number of the country which has granted/extended/refused/withdrawn an approval (see approval provisions in the Regulation).

⁵ Strike out what does not apply.

Annex 2

Arrangements of approval marks

(see paragraphs 4.4. to 4.4.2. of this Regulation)

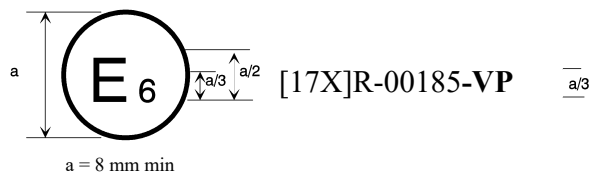

The above approval mark affixed to a vehicle shows that the vehicle type concerned has been approved in Belgium (E 6) with regard to the Acceleration Control for Pedal Error systems (ACPE) pursuant to UN Regulation No. [17X] (marked with V for Vehicle and Wall, P for Pedestrian). The first two digits of the approval number indicate that the approval was granted in accordance with the requirements of UN Regulation No. [17X] in its original form.

Annex 3

Special requirements to be applied to the safety aspects of electronic control systems

1. General

This annex defines the special requirements for documentation, fault strategy and verification with respect to the safety aspects of Complex Electronic Vehicle Control Systems (paragraph 2.4. below) as far as this Regulation is concerned.

This annex shall also apply to safety related functions identified in this Regulation which are controlled by electronic system(s) (paragraph 2.3.) as far as this Regulation is concerned.

This annex does not specify the performance criteria for "The System" but covers the methodology applied to the design process and the information which must be disclosed to the Technical Service, for type approval purposes.

This information shall show that "The System" respects, under non-fault and fault conditions, all the appropriate performance requirements specified elsewhere in this Regulation and that it is designed to operate in such a way that it does not induce safety critical risks.

2. Definitions

For the purposes of this annex,

- 2.1. *The System*" means an electronic control system or complex electronic control system that provides or forms part of the control transmission of a function to which this Regulation applies. This also includes any other system covered in the scope of this Regulation, as well as transmission links to or from other systems that are outside the scope of this Regulation, that acts on a function to which this Regulation applies."
- 2.2. *"Safety Concept"* is a description of the measures designed into the system, for example within the electronic units, so as to address system integrity and thereby ensure safe operation under fault and non-fault conditions, including in the event of an electrical failure. The possibility of a fall-back to partial operation or even to a back-up system for vital vehicle functions may be a part of the safety concept.
- 2.3. *"Electronic Control System"* means a combination of units, designed to co-operate in the production of the stated vehicle control function by electronic data processing. Such systems, often controlled by software, are built from discrete functional components such as sensors, electronic control units and actuators and connected by transmission links. They may include mechanical, electro-pneumatic or electro-hydraulic elements.
- 2.4. *"Complex Electronic Vehicle Control Systems"* are those electronic control systems in which a function controlled by an electronic system or the driver may be over-ridden by a higher level electronic control system/function. A function which is over-ridden becomes part of the complex system, as well as any overriding system/function within the scope of this Regulation. The transmission links to and from overriding systems/function outside of the scope of this Regulation shall also be included.

- 2.5. "*Higher-Level Electronic Control*" systems/functions are those which employ additional processing and/or sensing provisions to modify vehicle behaviour by commanding variations in the function(s) of the vehicle control system. This allows complex systems to automatically change their objectives with a priority which depends on the sensed circumstances.
- 2.6. "*Units*" are the smallest divisions of system components which will be considered in this annex, since these combinations of components will be treated as single entities for purposes of identification, analysis or replacement.
- 2.7. "*Transmission links*" are the means used for inter-connecting distributed units for the purpose of conveying signals, operating data or an energy supply. This equipment is generally electrical but may, in some part, be mechanical, pneumatic or hydraulic.
- 2.8. "*Range of control*" refers to an output variable and defines the range over which the system is likely to exercise control.
- 2.9. "*Boundary of functional operation*" defines the boundaries of the external physical limits within which the system is able to maintain control.
- 2.10. "*Safety Related Function*" means a function of "The System" that is capable of changing the dynamic behaviour of the vehicle. "The System" may be capable of performing more than one safety related function.

3. Documentation

3.1. Requirements

The manufacturer shall provide a documentation package which gives access to the basic design of "The System" and the means by which it is linked to other vehicle systems or by which it directly controls output variables. The function(s) of "The System" and the safety concept, as laid down by the manufacturer, shall be explained. Documentation shall be brief, yet provide evidence that the design and development has had the benefit of expertise from all the system fields which are involved. For periodic technical inspections, the documentation shall describe how the current operational status of "The System" can be checked.

The Technical Service shall assess the documentation package to show that "The System":

- (a) Is designed to operate, under non-fault and fault conditions, in such a way that it does not induce safety critical risks;
- (b) Respects, under non-fault and fault conditions, all the appropriate performance requirements specified elsewhere in this Regulation; and,
- (c) Was developed according to the development process/method declared by the manufacturer.

3.1.1. Documentation shall be made available in two parts:

- (a) The formal documentation package for the approval, containing the material listed in paragraph 3. (with the exception of that of paragraph 3.4.4.) which shall be supplied to the Technical Service at the time of submission of the type approval application. This documentation package shall be used by the Technical Service as the basic reference for the verification process set out in paragraph 4. of this annex. The Technical Service shall ensure that this documentation package remains available for a period determined in agreement with the Approval Authority. This period shall be at least 10 years counted from the time when production of the vehicle is definitely discontinued.

- (b) Additional material and analysis data of paragraph 3.4.4. which shall be retained by the manufacturer, but made open for inspection at the time of type approval. The manufacturer shall ensure that this material and analysis data remains available for a period of 10 years counted from the time when production of the vehicle is definitely discontinued."

3.2. Description of the functions of "The System"

A description shall be provided which gives a simple explanation of all the control functions of "The System" and the methods employed to achieve the objectives, including a statement of the mechanism(s) by which control is exercised.

Any described function that can be over-ridden shall be identified and a further description of the changed rationale of the function's operation provided.

3.2.1. A list of all input and sensed variables shall be provided and the working range of these defined.

3.2.2. A list of all output variables which are controlled by "The System" shall be provided and an indication given, in each case, of whether the control is direct or via another vehicle system. The range of control (paragraph 2.8.) exercised on each such variable shall be defined.

3.2.3. Limits defining the boundaries of functional operation (paragraph 2.9.) shall be stated where appropriate to system performance.

3.3. System layout and schematics

3.3.1. Inventory of components.

A list shall be provided, collating all the units of "The System" and mentioning the other vehicle systems which are needed to achieve the control function in question.

An outline schematic showing these units in combination, shall be provided with both the equipment distribution and the interconnections made clear.

3.3.2. Functions of the units

The function of each unit of "The System" shall be outlined and the signals linking it with other units or with other vehicle systems shall be shown. This may be provided by a labelled block diagram or other schematic, or by a description aided by such a diagram.

3.3.3. Interconnections

Interconnections within "The System" shall be shown by a circuit diagram for the electric transmission links, by a piping diagram for pneumatic or hydraulic transmission equipment and by a simplified diagrammatic layout for mechanical linkages. The transmission links both to and from other systems shall also be shown

3.3.4. Signal flow, operating data and priorities

There shall be a clear correspondence between these transmission links and the signals and/or operating data carried between units. Priorities of signals and/or operating data on multiplexed data paths shall be stated wherever priority may be an issue affecting performance or safety as far as this Regulation is concerned.

3.3.5. Identification of units

Each unit shall be clearly and unambiguously identifiable (e.g. by marking for hardware and marking or software output for software content) to provide corresponding hardware and documentation association.

Where functions are combined within a single unit or indeed within a single computer, but shown in multiple blocks in the block diagram for clarity and

ease of explanation, only a single hardware identification marking shall be used. The manufacturer shall, by the use of this identification, affirm that the equipment supplied conforms to the corresponding document.

- 3.3.5.1. The identification defines the hardware and software version and, where the latter changes such as to alter the function of the unit as far as this Regulation is concerned, this identification shall also be changed.
- 3.4. Safety concept of the manufacturer
- 3.4.1. The Manufacturer shall provide a statement which affirms that the strategy chosen to achieve "The System" objectives will not, under non-fault conditions, prejudice the safe operation of the vehicle.
- 3.4.2. In respect of software employed in "The System", the outline architecture shall be explained and the design methods and tools used shall be identified. The manufacturer shall show evidence of the means by which they determined the realisation of the system logic, during the design and development process.
- 3.4.3. The Manufacturer shall provide the Technical Service with an explanation of the design provisions built into "The System" so as to generate safe operation under fault conditions. Possible design provisions for failure in "The System" are for example:
- (a) Fall-back to operation using a partial system.
 - (b) Change-over to a separate back-up system.
 - (c) Removal of the high level function.
- In case of a failure, the driver shall be warned for example by warning signal or message display. When the system is not deactivated by the driver, e.g. by turning the ignition (run) switch to "off", or by switching off that particular function if a special switch is provided for that purpose, the warning shall be present as long as the fault condition persists.
- 3.4.3.1. If the chosen provision selects a partial performance mode of operation under certain fault conditions, then these conditions shall be stated and the resulting limits of effectiveness defined.
- 3.4.3.2. If the chosen provision selects a second (back-up) means to realise the vehicle control system objective, the principles of the change-over mechanism, the logic and level of redundancy and any built in back-up checking features shall be explained and the resulting limits of back-up effectiveness defined.
- 3.4.3.3. If the chosen provision selects the removal of the Higher Level Function, all the corresponding output control signals associated with this function shall be inhibited, and in such a manner as to limit the transition disturbance.
- 3.4.4. The documentation shall be supported, by an analysis which shows, in overall terms, how the system will behave on the occurrence of any individual hazard or fault which will have a bearing on vehicle control performance or safety.
- The chosen analytical approach(es) shall be established and maintained by the Manufacturer and shall be made open for inspection by the Technical Service at the time of the type approval.
- The Technical Service shall perform an assessment of the application of the analytical approach(es). The audit shall include:
- (a) Inspection of the safety approach at the concept (vehicle) level with confirmation that it includes consideration of interactions with other vehicle systems. This approach shall be based on a Hazard / Risk analysis appropriate to system safety.
 - (b) Inspection of the safety approach at the system level. This approach shall be based on a Failure Mode and Effect Analysis (FMEA), a Fault Tree Analysis (FTA) or any similar process appropriate to system safety.

- (c) Inspection of the validation plans and results. This validation shall use, for example, Hardware in the Loop (HIL) testing, vehicle on-road operational testing, or any means appropriate for validation.

The assessment shall consist of checks of hazards and faults chosen by the Technical Service to establish that the manufacturer's explanation of the safety concept is understandable, logical and that the validation plans are suitable and have been completed.

The Technical Service may perform or may require to perform tests as specified in paragraph 4. to verify the safety concept.

- 3.4.4.1. This documentation shall itemize the parameters being monitored and shall set out, for each fault condition of the type defined in paragraph 3.4.4. of this annex, the warning signal to be given to the driver and/or to service/technical inspection personnel.
- 3.4.4.2. This documentation shall describe the measures in place to ensure the "The System" does not prejudice the safe operation of the vehicle when the performance of "The System" is affected by environmental conditions e.g. climatic, temperature, dust ingress, water ingress, ice packing.

4. Verification and test

- 4.1. The functional operation of "The System", as laid out in the documents required in paragraph 3., shall be tested as follows:
 - 4.1.1. Verification of the function of "The System"

The Technical Service shall verify "The System" under non-fault conditions by testing a number of selected functions from those declared by the manufacturer in paragraph 3.2. above.

For complex electronic systems, these tests shall include scenarios whereby a declared function is overridden.
 - 4.1.2. Verification of the safety concept of paragraph 3.4.

The reaction of "The System" shall be checked under the influence of a failure in any individual unit by applying corresponding output signals to electrical units or mechanical elements in order to simulate the effects of internal faults within the unit. The Technical Service shall conduct this check for at least one individual unit, but shall not check the reaction of "The System" to multiple simultaneous failures of individual units.

The Technical Service shall verify that these tests include aspects that may have an impact on vehicle controllability and user information (HMI aspects)."
 - 4.1.2.1. The verification results shall correspond with the documented summary of the failure analysis, to a level of overall effect such that the safety concept and execution are confirmed as being adequate.

5. Reporting by Technical Service

Reporting of the assessment by the Technical Service shall be performed in such a manner that allows traceability, e.g. versions of documents inspected are coded and listed in the records of the Technical Service.

An example of a possible layout for the assessment form from the Technical Service to the Type Approval Authority is given in Appendix 1 to this Annex.

Annex 3 - Appendix 1

Model assessment form for electronic systems

Test report No:

1. Identification

1.1. Vehicle make:

1.2. Type:

1.3. Means of identification of type if marked on the vehicle:

1.4. Location of that marking:

1.5. Manufacturer's name and address:

1.6. If applicable, name and address of manufacturer's representative:

1.7. Manufacturer's formal documentation package:

Documentation reference No:

Date of original issue:

Date of latest update:

2. Test vehicle(s)/system(s) description

2.1. General description:

2.2. Description of all the control functions of "The System", and methods of operation:..

2.3. Description of the components and diagrams of the interconnections within "The System":

3. Manufacturer's safety concept

3.1. Description of signal flow and operating data and their priorities:

3.2. Manufacturer's declaration:

The manufacturer(s) affirm(s) that the strategy chosen to achieve "The System", objectives will not, under non-fault conditions, prejudice the safe operation of the vehicle.

3.3. Software outline architecture and the design methods and tools used:

3.4. Explanation of design provisions built into "The System" under fault conditions:

3.5. Documented analyses of the behaviour of "The System" under individual hazard or fault conditions:

3.6. Description of the measures in place for environmental conditions:

3.7. Provisions for the periodic technical inspection of "The System":

3.8. Results of "The System" verification test, as per para. 4.1.1. of Annex 3 to UN Regulation No. [17X]:

3.9. Results of safety concept verification test, as per para. 4.1.2. of Annex 3 to UN Regulation No. [17X]:

3.10. Date of test:

3.11. This test has been carried out and the results reported in accordance with to UN Regulation No. [17X] as last amended by the series of amendments.

Signed: Date:

3.13. Comments:

