



C L E P A

*European Association of
Automotive Suppliers*

Proposal for the addition of a lateral
facing carrycot icon to the module
labeling options.

Format review of module label

Improved for 63nd IG


Erik Salters,
Dorel

24rth of January 2016




Current R129-01

- Current R129-01 depicts following label to be placed on a module:

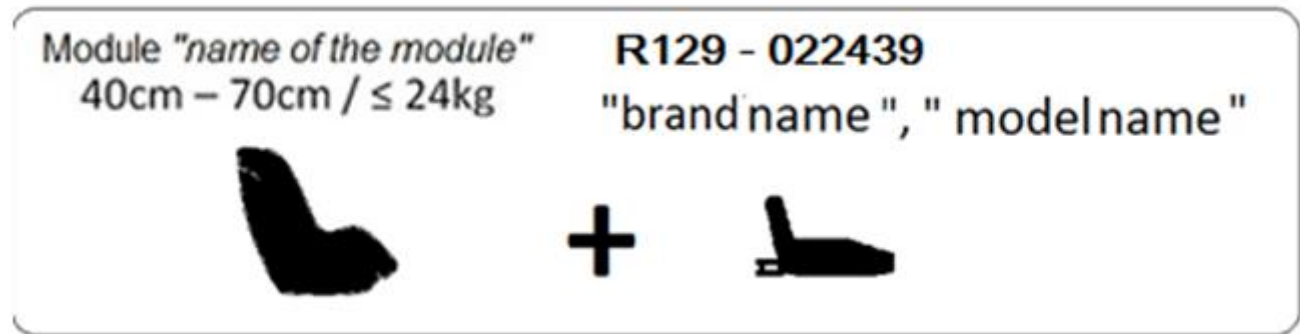

- The module label must use one of the following symbols:

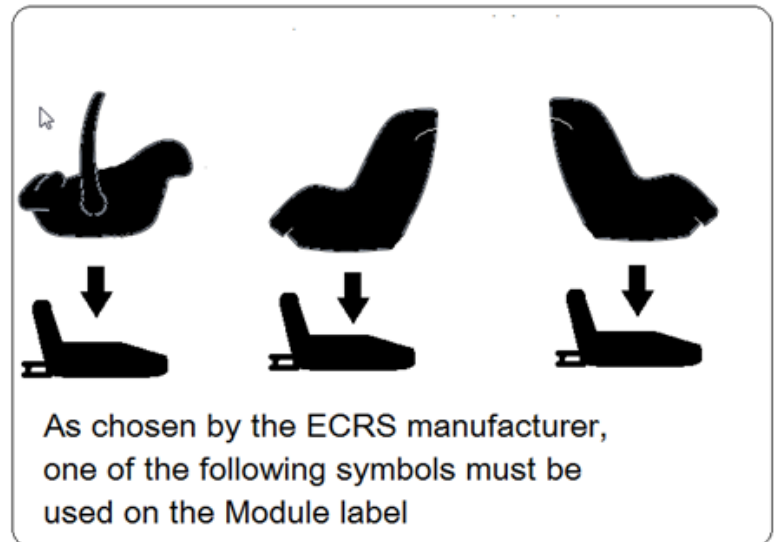


62nd IG work



- In the 61st meeting a proposal to add a Lateral facing carrycot was presented.
- Different arrow requested for the lateral facing carrycot (Vti, ANEC; @ 61st meeting)
- New suggestion:

By choice of the ECRS manufacturer, one or more of the following symbols must be used on the module label

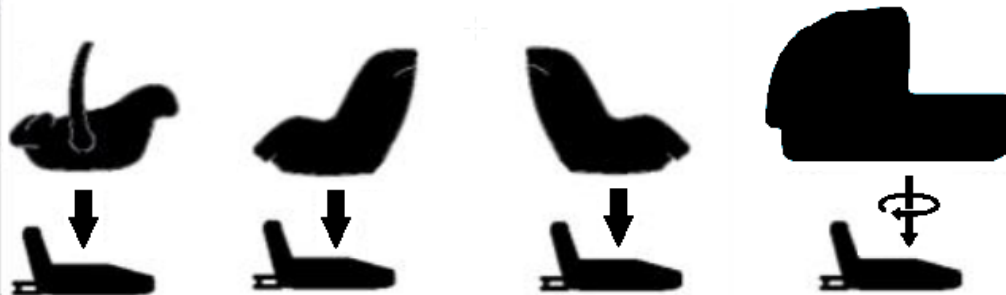




62nd IG accepted a new proposal


Current (= R129-01)

Module label

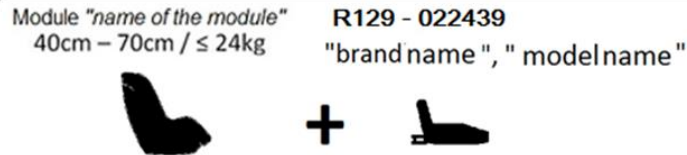


New

Module "name of module"
45cm - 75cm / <12kg




'Brand name", "modelname"
R129-022439

Icons to choose from

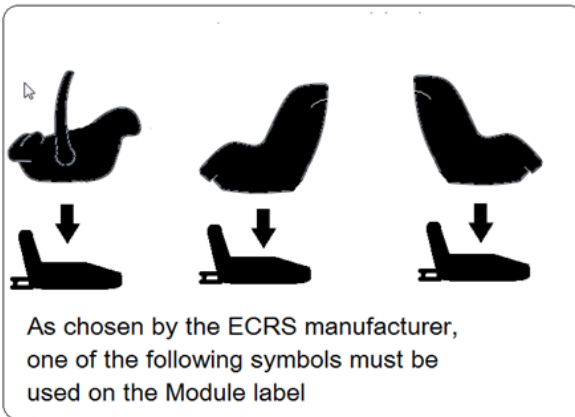

By choice of the ECRS manufacturer, one or more of the following symbols must be used on the module label

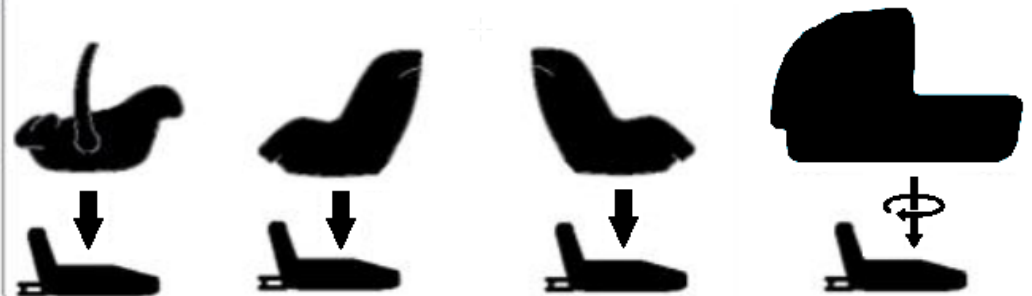

Challenges identified @ GRSP (after the 62nd IG)



1. What if a module can be used on multiple bases; how to identify the different bases?
2. What if a babyshell can be used stand alone and in combination with a base? This requires Approval info + Module info.
3. If a Module can be used in multiple directions, each direction could have a different usage wrt size range; how are those size range limitations communicated?


Proposals for 63rd IG; Question 1.




1. What if a module can be used on multiple bases?

Propose to require that each base is identified. 2 suggestions:

A. Multiple module labels on one module?

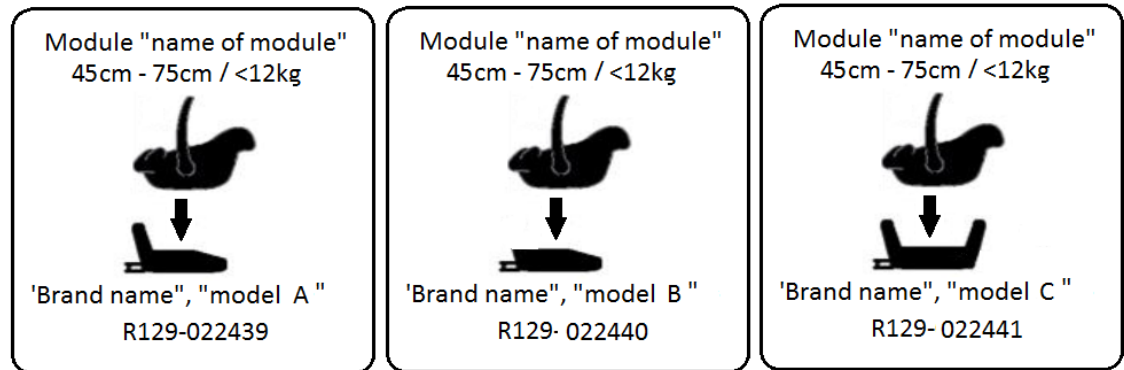

B. One module label with ref to different bases inc homologation numbers?

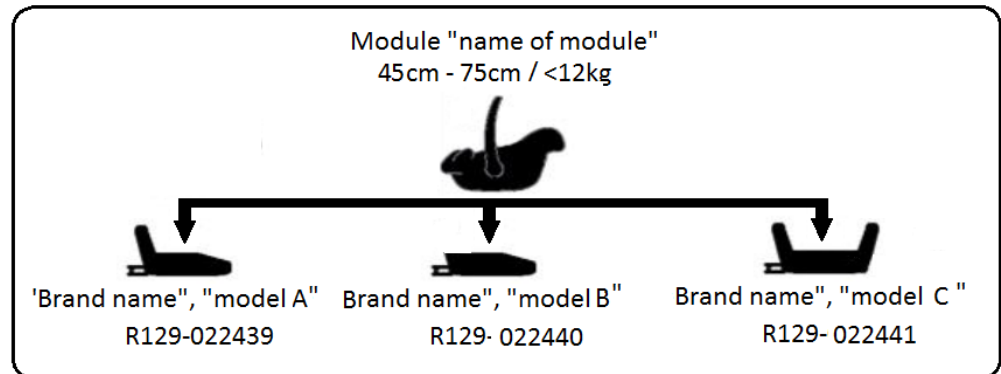

CLEPA
preference →



C. Allow both A or B

Proposals for 63rd IG; Question 2.







2. What if a babyshell can be used stand alone and in combination with a base?
3. Proposal; refer to both in a separate label:

Standalone mode => normal approval label

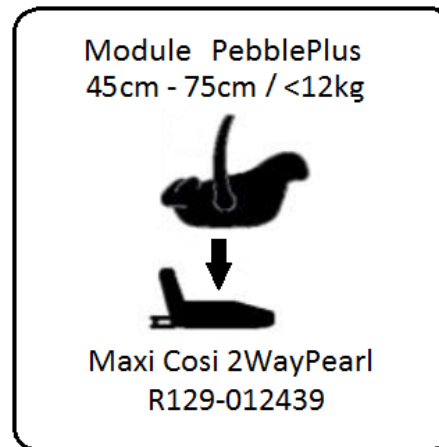
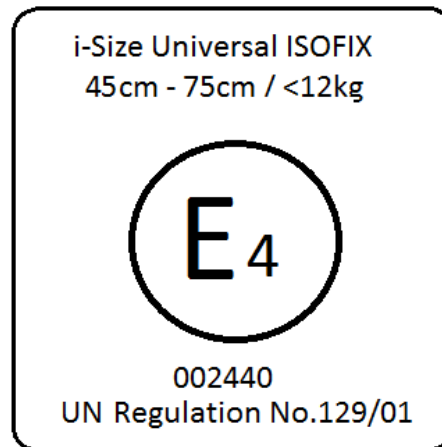


Module mode => normal module label

Note; combined with the answer of question 1, we thus get this:



or this:

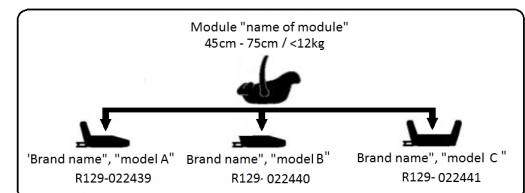

Proposals for 63rd IG; Question 3



3. If a Module can be used in multiple directions, and each direction would have a different usage wrt size range, how are those size range limitations communicated?

Proposal : Each orientation + size range is already required on the product's instructions (as already done on all RF/FF products)

