

# eTIR web services - Messages I1-I2

I1 - Accept guarantee / I2 - Acceptance results



# Table of Contents

1. Document revision note	1
2. Related documents	1
3. Purpose	2
4. Target audience	2
5. Prerequisites	2
6. "I1 - Accept guarantee" / "I2 - Acceptance results" messages	3
6.1. Sequence diagram	3
6.2. Message context	3
6.2.1. Message prerequisites	4
6.2.2. Endpoint URL	4
6.3. "I1 - Accept guarantee" request message	5
6.3.1. Description	5
6.3.2. Field list	5
6.3.3. Field descriptions	5
6.3.4. Referred code lists	7
6.3.5. Example	7
6.4. "I2 - Acceptance results" response message	8
6.4.1. Description	8
6.4.2. Field list	8
6.4.3. Field descriptions	8
6.4.4. Referred code lists	10
6.4.5. Conditions and Rules	10
6.4.6. How to use response data in the national customs systems	10
6.4.7. Applicable error codes	10
6.4.8. Example	12
7. Fallback procedures	12
8. Support and contact	13
9. Annexes	14
9.1. Version history	14
9.2. XSD Files content	14
9.2.1. Request format	14
9.2.2. Response format	17



# 1. Document revision note



This document has been published on **08/10/2020**, and is valid for the **eTIR international system version 1.0** based on the **eTIR specifications version 4.3a**.

Please ensure you get the latest version of this document from the [eTIR documentation portal](#) or contact the eTIR service desk ([Support and contact](#)).

## 2. Related documents

### Project documents and collaboration platform

- eTIR documentation portal: <https://wiki.unece.org/display/ED/eTIR+documentation+-+Homepage>
- Project guidelines for customs to connect to the eTIR international system : <https://wiki.unece.org/download/attachments/106299939/Project%20Guidelines%20for%20customs%20to%20connect%20to%20the%20eTIR%20international%20system.pdf>
- eTIR web services - Introduction document: <https://wiki.unece.org/download/attachments/106299935/eTIR%20web%20services%20-%20Introduction%20document.pdf>

### Legal framework

- TIR Convention handbook: <http://www.unece.org/tir/tir-hb.html>
- Annex 11 to the TIR Convention: <http://www.unece.org/fileadmin/DAM/trans/bcf/ac2/documents/2020/ECE-TRANS-WP30-AC2-147e.pdf#page=12>

### eTIR specifications

- Introduction to the eTIR conceptual, functional and technical v4.2: [http://www.unece.org/fileadmin/DAM/trans/bcf/adhoc/conc\\_tech/documents/id17-05e.pdf](http://www.unece.org/fileadmin/DAM/trans/bcf/adhoc/conc_tech/documents/id17-05e.pdf)
- eTIR concepts v4.2: [http://www.unece.org/fileadmin/DAM/trans/bcf/adhoc/conc\\_tech/documents/id17-06e.pdf](http://www.unece.org/fileadmin/DAM/trans/bcf/adhoc/conc_tech/documents/id17-06e.pdf)
- eTIR Functional specifications v4.2: [http://www.unece.org/fileadmin/DAM/trans/bcf/adhoc/conc\\_tech/documents/id17-07e.pdf](http://www.unece.org/fileadmin/DAM/trans/bcf/adhoc/conc_tech/documents/id17-07e.pdf)
- Approved amendments to the eTIR specifications v4.2 to prepare v4.3: <http://www.unece.org/fileadmin/DAM/trans/bcf/wp30/documents/2020/ECE-TRANS-WP30-2020-07e.pdf>

### Additional resources

- eTIR XML schemas: <https://wiki.unece.org/display/ED/Technical+artefacts>
- eTIR code lists: [https://www.unece.org/fileadmin/DAM/trans/bcf/eTIR/documents/CodeLists0\\_4.pdf](https://www.unece.org/fileadmin/DAM/trans/bcf/eTIR/documents/CodeLists0_4.pdf)
- List of eTIR focal points: <http://www.unece.org/trans/bcf/etir/focals.html>

## 3. Purpose

This document describes the **I1 - Accept guarantee** request message, and the **I2 - Acceptance results** response message of the eTIR international system web services. It provides all the specifics required to use them (prepare or receive), explains how and when they should be used and explains the error codes that may be returned. It also contains examples and fallback procedures, if applicable.

## 4. Target audience

This guide is intended for the customs authorities ICT teams in charge of interconnecting their national customs systems to the eTIR international system.

## 5. Prerequisites



In order to ensure an implementation that delivers the best value and services to the customs authorities, we recommend for the ICT team in charge of establishing the connection to the eTIR international system web services to be accompanied by a TIR subject matter expert.

This document is to be read after having an understanding of the [eTIR concepts](#) and having read the [eTIR functional specifications](#). It is highly recommended keeping the [eTIR web services introduction document](#) at hand as the current document refers to many elements and diagrams available in that document (and in its glossary).

From a technical perspective, the following steps should have been completed at this point:

- A secured connection to the User Acceptance Testing (UAT) environment of the eTIR international system is established;
- The endpoint URL to the UAT environment is clearly identified and properly configured in the national customs systems;
- All the actions mentioned in the [prerequisites section](#) of the eTIR web services introduction document are performed;
- All the tools required to prepare, receive, test and troubleshoot the messages are ready.




All eTIR messages are identified and belong to a flow described in the eTIR sequence diagrams section of the [eTIR web services introduction document](#). It is key to respect this sequencing, otherwise the eTIR international system will return errors due to invalid sequencing of the messages as described in the [dedicated eTIR error code web page](#).

# 6. "I1 - Accept guarantee" / "I2 - Acceptance results" messages

## 6.1. Sequence diagram

The following sequence diagram highlights the role and sequence position of the **I1 - Accept guarantee** and **I2 - Acceptance results** messages in the context of a TIR departure operation.

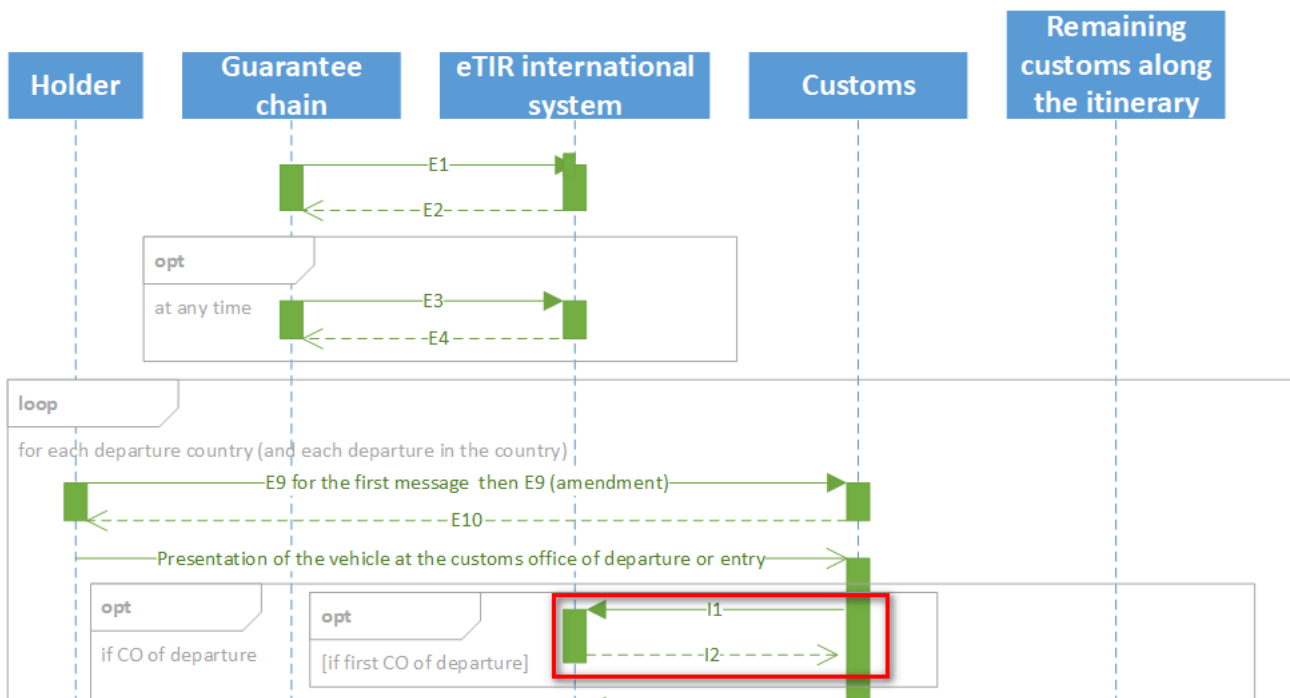


The full eTIR sequence diagrams (Departure, Transit and Destination) are available in the dedicated section of the [eTIR web services introduction document](#).

## 6.2. Message context

The **I1 - Accept guarantee** message is mandatory before starting a TIR transport and should be prepared and sent after the presentation of the road vehicle, the combination of vehicles or the container at the customs offices of departure (or entry) and after the transported goods have been inspected, checked against the advance TIR data, and the seals affixed.

The guarantee can have different states and it is important to be aware of its life cycle, the figure below outline them. For more information please refer to the [eTIR specification section dedicated to the guarantee](#) if you need more information.

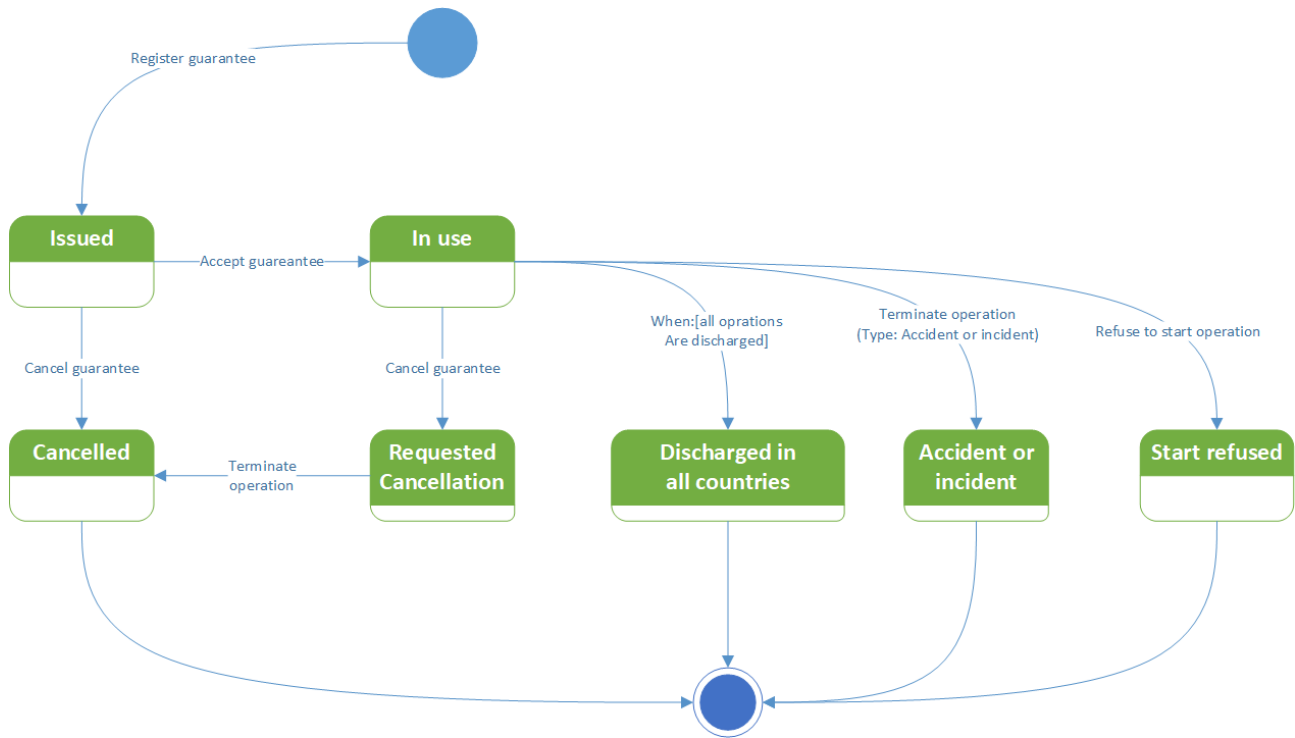

### 6.2.1. Message prerequisites

In order for this message to be properly interpreted by the eTIR international system, the following messages should have been exchanged before this one:

- **E1 - Register guarantee** and **E2 - Registration results** (between the guarantee chain and the eTIR international system): the eGuarantee that was purchased by the holder must first be registered by the guarantee chain to the eTIR international system so it is known and usable in the system.
- **E9 - Advance TIR data** and **E10 - Advance TIR data results** (between the TIR carnet holder and the national customs systems): the holder will have sent to the customs office of departure the advance TIR data that acts as the pre-declaration for the transport.

### 6.2.2. Endpoint URL

The URL of the endpoint to use when sending the I1 - Accept guarantee request message is: <https://etir-uat-01.unece.org/etir/v4.3/customs/acceptGuarantee>

Also note that the WSDL can be accessed at the following URL: <https://etir-uat-01.unece.org/etir/v4.3/customs/acceptGuarantee?wsdl>

## 6.3. "I1 - Accept guarantee" request message

### 6.3.1. Description

The national customs systems sends the **I1 - Accept guarantee** request message to the eTIR international system confirming that the guarantee has been accepted by the customs authorities.

The XSD file related to the **I1 - Accept guarantee** message is available at the following URL: [https://www.unece.org/trans/bcf/etir/xml\\_schemas.html](https://www.unece.org/trans/bcf/etir/xml_schemas.html).

### 6.3.2. Field list

eTIR field name	Mapping to the XML element (XPATH)	Mandatory	Format	Code lists	Conditions	Rules	WCO ID
MESSAGE							75B
└ Message function, coded	Function	R	n..2	CL16			017
└ Message identifier	ID	R	an..70				D014
└ Type, coded	TypeCode	R	an..3	CL26			D013
└─ GUARANTEE	ObligationGuarantee	R					90A
└ Acceptance date	ObligationGuarantee/AcceptanceDateTime	R	an..35				023
└ Reference	ObligationGuarantee/ReferenceID	R	an..35				100
└ Guarantee type, coded	ObligationGuarantee/SecurityDetailsCode	R	an..3	CL12			101
└─ GUARANTEECHAIN	ObligationGuarantee/Surety	R					19B
└ └ Code	ObligationGuarantee/Surety/ID	R	an..35				R055
└─ HOLDER	ObligationGuarantee/Principal	R					28B
└ └ Code	ObligationGuarantee/Principal/ID	R	an..35				R002

### 6.3.3. Field descriptions

eTIR field name	Mapping to the XML element (XPATH)	Description	Usage
MESSAGE			
└ Message function, coded	Function	Code indicating the function of a document	The function code should be set to '9' (Original)
└ Message identifier	ID	Identifier of the message	The value is a Globally Unique Identifier (GUID) for this message

eTIR field name	Mapping to the XML element (XPATH)	Description	Usage
└ Type, coded	TypeCode	Identifier of the request type	The only value accepted for this message is the message code value (either I1 for the request message or I2 for the response message).
└─ GUARANTEE	ObligationGuarantee		
└─ Acceptance date	ObligationGuarantee/AcceptanceDateTime	Date on which a document has been or will be accepted in accordance with governmental legislation.	This field is mandatory but the date information can be provided following the EDIFACT 208 format CCYYMMDDHHMMSSZHMM (https://www.unece.org/fileadmin/DAM/trade/untidid/d17a/tred/tred2379.htm). For Example: 20200820145600+0100 represents 20 August 2020 at 14:56 UTC+01:00.
└ Reference	ObligationGuarantee/ReferenceID	This is the unique identifier of the guarantee which was accepted	This value is retrieved from the I7 - Record declaration data previously received
└ Guarantee type, coded	ObligationGuarantee/SecurityDetailsCode	The type of the guarantee as defined in the code list CL12 (https://www.unece.org/fileadmin/DAM/trans/bcf/eTIR/documents/CodeLists0_4.pdf#page=113)	This value is retrieved from the I7 - Record declaration data previously received
└─└─ GUARANTEECHAIN	ObligationGuarantee/Surety		
└─└─ Code	ObligationGuarantee/Surety/ID	Identifier of the guarantee chain which issued the guarantee	The value of this field is 'IRU' for guarantees issued by the International Road transport Union. This value is retrieved from the I7 - Record declaration data previously received
└─└─ HOLDER	ObligationGuarantee/Principal		
└─└─ Code	ObligationGuarantee/Principal/ID	Identifier of the TIR carnet holder associated to the guarantee	This value matches the holder's identifier in ITDB. This value is retrieved from the I7 - Record declaration data previously received



When reading the values of the second columns for both tables, note that the "InterGov/" XML base element has been removed to improve the readability, as it is repeated on every line.



### 6.3.4. Referred code lists

The following code lists are referred to in the field lists and should be considered when sending the message:

- **CL12** - Guarantee type code (eTIR)
- **CL16** - Message function code (UN/EDIFACT 1225)
- **CL26** - Message types (eTIR)



All codes lists are described in the [eTIR code lists document](#).

### 6.3.5. Example

The example below shows the XML data to be sent via POST method to the [endpoint URL](#) to request the guarantee **XF95001234** (of type **Z**) issued by the guarantee chain **IRU** for the TIR carnet holder **FRA/020/998** on the date of **2019/07/23** when the guarantee needs to be accepted.

#### I1 - Accept guarantee request message

```
<?xml version="1.0" encoding="UTF-8"?>
<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope" xmlns:cus="etir:v4.3:customs" xmlns:urn=
"etir:I1:v4.3" xmlns:urn1="urn:wco:datamodel:WCO:MetaData_DS">
  <soap:Header xmlns:wsa="http://www.w3.org/2005/08/addressing">
    (...)
    <wsa:Action>etir:v4.3:customs/acceptGuarantee</wsa:Action>
    (...)
  </soap:Header>
  <soap:Body xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd" wsu:Id=
"id-4eed340a-58d8-4d4d-b1b9-e9b94ba4baf1">
    <cus:acceptGuarantee>
      <urn:InterGov>
        <urn:FunctionCode>9</urn:FunctionCode>
        <urn:ID>FR:6aca5f82-2285-4f00-b4ae-36269d4cc865</urn:ID>
        <urn:TypeCode>I1</urn:TypeCode>
        <urn:ObligationGuarantee>
          <urn:ReferenceID>XF95001234</urn:ReferenceID>
          <urn:AcceptanceDateTime>2019/07/23</urn:AcceptanceDateTime>
          <urn:SecurityDetailsCode>Z</urn:SecurityDetailsCode>
          <urn:Surety>
            <urn:ID>IRU</urn:ID>
          </urn:Surety>
          <urn:Principal>
            <urn:ID>FRA/020/998</urn:ID>
          </urn:Principal>
        </urn:ObligationGuarantee>
      </urn:InterGov>
    </cus:acceptGuarantee>
  </soap:Body>
</soap:Envelope>
```



Some field original contents have been shortened (...) in this document for the sake of readability, in particular the whole **header/security** content that is described in the [eTIR web services introduction document](#).

## 6.4. "I2 - Acceptance results" response message

### 6.4.1. Description

The eTIR international system sends back the **I2 - Acceptance results** response message to the national customs systems to confirm the correct reception and recording of the acceptance of the guarantee.

The XSD file related to the **I2 - Acceptance results** message is available at the following URL: [https://www.unece.org/trans/bcf/etir/xml\\_schemas.html](https://www.unece.org/trans/bcf/etir/xml_schemas.html).

### 6.4.2. Field list

eTIR field name	Mapping to the XML element (XPATH)	Mandatory	Format	Code lists	Conditions	Rules	WCO ID
MESSAGE							75B
└ Message function, coded	Function	R	n..2	CL16			017
└ Functional reference	FunctionalReferenceID		an..70				D026
└ Message identifier	ID	R	an..70				D014
└ Type, coded	TypeCode	R	an..3	CL26			D013
└└ ERROR	Error	D			C006		53A
└ Error, coded	Error/ValidationCode		an..8	CL99			377
└└ POINTER	Error/Pointer	R					97A
└ Sequence number	Error/Pointer/SequenceNumeric	R	n..5				006
└ Location	Error/Pointer/Location	R	an..512				512
└└ GUARANTEE	ObligationGuarantee	R					90A
└ Reference	ObligationGuarantee/ReferenceID	R	an..35				100

### 6.4.3. Field descriptions

eTIR field name	Mapping to the XML element (XPATH)	Description	Usage
MESSAGE			
└ Message function, coded	Function	Code indicating the function of a document	The function code should be set to '11' (Response)
└ Functional reference	FunctionalReferenceID	Identifier of the request message associated with this response	This is the value that was in the Message identifier field of the request message (I1)
└ Message identifier	ID	Identifier of the message	The value is a Globally Unique Identifier (GUID) for this message

eTIR field name	Mapping to the XML element (XPATH)	Description	Usage
Type, coded	TypeCode	Identifier of the request type	The only value accepted for this message is the message code value (either I1 for the request message or I2 for the response message).
ERROR	Error	List of errors, if any	There can have errors only if the value of the 'Message function, coded' is 27.
Error, coded	Error/ValidationCode	Type of the error encountered by the eTIR international system	Refers to CL99 for details on the possible values and their meaning
POINTER	Error/Pointer		
Sequence number	Error/Pointer/SequenceNumeric	Number used to differentiate errors	This is an auto-incremented integer
Location	Error/Pointer/Location		
GUARANTEE	ObligationGuarantee		
Reference	ObligationGuarantee/ReferenceID	This is the unique identifier of the guarantee which was accepted	This value is retrieved from the I7 - Record declaration data previously received



When reading the values of the second columns for both tables, note that the "InterGov/" XML base element has been removed to improve the readability, as it is repeated on every line.

#### 6.4.4. Referred code lists

The following code lists are referred to in the field lists and should be considered when sending the message:

- [CL16](#) - Message function code (UN/EDIFACT 1225)
- [CL26](#) - Message types (eTIR)
- [CL99](#) - Error code (eTIR)



All codes lists are described in the [eTIR code lists document](#).

#### 6.4.5. Conditions and Rules

The following conditions of the [eTIR conditions list](#) are referred to in the field lists and should be considered in the message:

- **C006:** IF( MESSAGE.Message function, coded) = '6' OR '11' OR '44' OR '45'  
THEN EMPTY( ERROR )  
ELSE  
IF( MESSAGE.Message function, coded) = '10' OR '27'  
THEN NOT EMPTY( ERROR )

#### 6.4.6. How to use response data in the national customs systems

The eTIR international system will return whether there were errors while processing the request message by filling in the "Errors" list. Therefore, and as for all response messages expected from the eTIR international system, the first step when parsing the **I2 - Acceptance results** response message should always be to look for potential error elements in the response message and address them accordingly as mentioned in the Error Management section of the [Introduction document](#).

If there are no errors listed in the response message, check that the reference of the guarantee that has been recorded as accepted in the eTIR international system is indeed the same as the one mentioned in the **I1 - Accept guarantee** message that you sent. If it's not the case, then you should contact the eTIR support (see [Support and contact](#)) to report this issue so that it can be investigated as soon as possible.

If there was no errors and the response message content is as expected, the next step is for the national customs systems to send the declaration data to the eTIR international system using the **I7 - Record declaration data** message.

#### 6.4.7. Applicable error codes

As the eTIR international system may return error codes, the [eTIR web services introduction document](#) contains a dedicated section describing how and where to find those error codes in the response messages. Find below the list of error codes that may be returned as part of the **I2 - Acceptance results** response message as well as the recommended actions to address them:

##### *100 - Invalid Message*

Kindly check the message itself and its format as it is not recognized by the eTIR international system.

##### *101 - Missing Parameter*

Kindly check the message parameters, in particular the parameters marked as mandatory in the message description section of this document, and make sure that all mandatory parameters are

part of the message.

#### *102 - Invalid Domain Value Parameter*

Kindly check the coded parameter, its values and corresponding code lists. Make sure that each coded parameter is using one of the values of the corresponding code list.

#### *200 - Invalid State*

Kindly check the state of the referred object (transport, guarantee, ...) and make sure it is consistent with the eTIR international system requested web service called.

#### *201 - Guarantee not acceptable*

Kindly check the state of the guarantee you tried to accept, and make sure it is conform the workflow described in the [guarantee state diagram](#).

#### *300 - Invalid Operation*

Kindly check the message content as it triggered a technical error in the eTIR international system but that this one could not identify the source of the issue.

#### *301 - Guarantee not found*

Kindly check the value of the guarantee reference ID in the message and make sure it matches the value received in previous messages.

#### *302 - Guarantee chain not found*

Kindly check the value of the guarantee chain ID in the message and make sure it matches the value received in previous messages.

#### *303 - Guarantee type not found*

Kindly check the value of the guarantee type in the message and make sure it belongs to the [Guarantee type code \(eTIR\)](#) code list, and that it matches the value received in previous messages.

#### *320 - Holder/Guarantee mismatch*

Kindly check the format and value of the TIR carnet holder in the message and make sure it matches the value received in previous messages. If it does, kindly check the existence of the holder and its status using either eTIR I3 - Get holder information message, ITDB dedicated web services or ITDB web application.

#### *330 - Guarantee chain not authorized*

Kindly check the value of the guarantee chain ID in the message and make sure it matches the value received in previous messages.

#### *331 - Guarantee chain/Guarantee mismatch*

Kindly check the value of the guarantee chain ID in the message and make sure it matches the value received in previous messages.

#### *332 - Guarantee type/Guarantee mismatch*

Kindly check the value of the guarantee type ID in the message and make sure it matches the value received in previous messages.

#### *400 - eTIR Problem*

Kindly contact eTIR support (see [Support and contact](#)) sending the content of the message communicated, the timestamps and the steps to reproduce this issue in order to address this issue.



The full list of error codes can be found on the [dedicated error code list web page](#).

## 6.4.8. Example

The example below shows the XML data of the **I2 - Acceptance results** message received in response to the POST of the **I1 - Accept guarantee** message. This response message (Function code **11**) of the type **I2** defines it as (guarantee) acceptance result message for the guarantee reference ID **XF95001234**. It contains no error codes, therefore it should be considered that the guarantee is accepted.



It is important to understand that the absence of error in the **I2 - Acceptance results** response message is the key indicator to reflect that the guarantee is accepted.

### I2 - Acceptance results response message

```
<?xml version="1.0" encoding="UTF-8"?>
<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope">
  <soap:Header>
    (...)
    <Action xmlns="http://www.w3.org/2005/08/addressing"
      xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
      wsu:Id="id-...">etir:v4.3:customs/CustomsSEI/acceptGuaranteeResponse</Action>
    (...)
  </soap:Header>
  <soap:Body xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
    wsu:Id="id-...">
    <ns2:acceptanceResults xmlns:ns2="etir:v4.3:customs" (...)>
      <ns6:InterGov>
        <ns6:FunctionCode>11</ns6:FunctionCode>
        <ns6:FunctionalReferenceID>FR:6aca5f82-2285-4f00-b4ae-36269d4cc865</ns6:FunctionalReferenceID>
        <ns6:TypeCode>I2</ns6:TypeCode>
        <ns6:ObligationGuarantee>
          <ns6:ReferenceID>XF95001234</ns6:ReferenceID>
        </ns6:ObligationGuarantee>
      </ns6:InterGov>
    </ns2:acceptanceResults>
  </soap:Body>
</soap:Envelope>
```



Some field original contents have been shortened (...) in this document for the sake of readability, in particular the whole **header/security** content that is described in the [eTIR web services introduction document](#).

## 7. Fallback procedures

In the event that the **I1 - Accept guarantee** could not be sent after several attempts or if no **I2 - Acceptance results** was received in response, we recommend the national customs systems team to contact eTIR support ([Support and contact](#)).

Also note that the functional fallback procedures can be found in the [Approved amendments to the eTIR conceptual, functional and technical documentation](#).

## 8. Support and contact

Kindly note that in the context of the interconnections projects by customs, the TIR secretariat stands ready to assist contracting parties while interconnecting their national customs systems to the eTIR international system. Also in case of questions or issues related to this document or to the eTIR international system, you can use the contact details below (contacts by email should be preferred).

*Organization*      United Nations Economic Commission For Europe  
TIR secretariat  
Palais des Nations,  
1211 Geneva 10, Switzerland

*Contact*            Email: [etir@un.org](mailto:etir@un.org)  
Phone: +41 (0)22 917 55 06

# 9. Annexes

## 9.1. Version history

Date	Author	Version	Notes	eTIR specification version reference
08/10/2020	UNECE TIR Secretariat	1.0	Initial draft	4.3a

## 9.2. XSD Files content

### 9.2.1. Request format

The I1 - Accept guarantee message should follow the format expressed by the XSD below:

#### I1 - Accept guarantee request message format

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:I1_1p0="etir:I1:v4.3"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:ds="etir:MetaData_DS:v4.3"
  targetNamespace="etir:I1:v4.3"
  elementFormDefault="qualified">
  <xs:import namespace="etir:MetaData_DS:v4.3" schemaLocation="WCO_MetaData_DS.xsd"/>
  <xs:element name="InterGov">
    <xs:annotation>
      <xs:documentation>
        <eTIRName>Message</eTIRName>
        <Disclaimer>
          Usage and disclaimer clause
        </Disclaimer>
      </xs:documentation>
    </xs:annotation>
  </xs:element>
  <xs:complexType base="InterGov" >
    <xs:sequence>
      <xs:element name="FunctionCode" type="ds:InterGovFunctionCodeType">
        <xs:annotation>
          <xs:documentation xml:lang="EN">
            <Format>n..2</Format>
          </xs:documentation>
          <xs:documentation>
            <eTIRName>Message function, coded</eTIRName>
          </xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:schema>
```

This(ese) schema(s) may be used, copied, amended and furnished to others in whole or in part, without restriction of any kind other than the obligation to keep this usage and disclaimer clause in it (them) and the references to UNECE. However, once modified, schemas may no longer be distributed under the name of UNECE.

Disclaimer: These schemas are provided "as is", without warranty of any kind, either express or implied, including, without limitation, warranties of merchantability, fitness for a particular purpose and non-infringement. The United Nations specifically does not make any warranties or representations as to the accuracy or completeness of any such schemas. The United Nations may add, change, improve or update the schemas without notice. Under no circumstances shall the United Nations be liable for any loss, damage, liability or expense incurred or suffered that is claimed to have resulted from the use of these schemas, including, without limitation, any fault, error, omission, interruption or delay with respect thereto. Under no circumstances, including but not limited to negligence, shall the United Nations or its affiliates be liable for any direct, indirect, incidental, special or consequential damages, even if the United Nations has been advised of the possibility of such damages.

The user specifically acknowledges and agrees that the United Nations is not liable for any conduct of any user. As a condition of using these schemas, the user agrees to indemnify the United Nations and its affiliates from and against any actions, claims, losses, damages, liabilities and expenses arising out of the user's use of these schemas. If the user is dissatisfied with any schema, the user's sole and exclusive remedy is to discontinue using such schemas.

Nothing herein shall constitute or be considered to be a limitation upon or a waiver of the privileges and immunities of the United Nations, which are specifically reserved.

```
</Disclaimer>
</xs:documentation>
</xs:annotation>
<xs:complexType>
  <xs:sequence>
    <xs:element name="FunctionCode" type="ds:InterGovFunctionCodeType">
      <xs:annotation>
        <xs:documentation xml:lang="EN">
          <Format>n..2</Format>
        </xs:documentation>
        <xs:documentation>
          <eTIRName>Message function, coded</eTIRName>
        </xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```



```

    <CodeList>CL16</CodeList>
    <Status>R</Status>
    <RestrictedCode>9</RestrictedCode>
  </xs:documentation>
</xs:annotation>
</xs:element>
<xs:element name="ID" type="ds:InterGovIdentificationIDType">
  <xs:annotation>
    <xs:documentation xml:lang="EN">
      <Format>an..70</Format>
    </xs:documentation>
    <xs:documentation>
      <eTIRName>Message identifier</eTIRName>
      <Status>R</Status>
    </xs:documentation>
  </xs:annotation>
</xs:element>
<xs:element name="TypeCode" type="ds:InterGovTypeCodeType">
  <xs:annotation>
    <xs:documentation xml:lang="EN">
      <Format>an..3</Format>
    </xs:documentation>
    <xs:documentation>
      <eTIRName>Type, coded</eTIRName>
      <CodeList>CL26</CodeList>
      <Status>R</Status>
      <RestrictedCode>I1</RestrictedCode>
    </xs:documentation>
  </xs:annotation>
</xs:element>
<xs:element name="ObligationGuarantee">
  <xs:annotation>
    <xs:documentation>
      <eTIRName>Guarantee</eTIRName>
      <Status>R</Status>
    </xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="AcceptanceDateTime" type="ds:EtirDateTimeType">
        <xs:annotation>
          <xs:documentation xml:lang="EN">
            <Format>an..35</Format>
          </xs:documentation>
          <xs:documentation>
            <eTIRName>Acceptance date</eTIRName>
            <Status>R</Status>
            <DateTimeFormatCode>304 (CCYYMMDDHHMSSZZZ)</DateTimeFormatCode>
          </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="ReferenceID" type="ds:ObligationGuaranteeReferenceIDType">
        <xs:annotation>
          <xs:documentation xml:lang="EN">
            <Format>an..35</Format>
          </xs:documentation>
          <xs:documentation>
            <eTIRName>Reference</eTIRName>
            <Status>R</Status>
          </xs:documentation>
        </xs:annotation>
      </xs:element>
      <xs:element name="SecurityDetailsCode" type="ds:ObligationGuaranteeSecurityDetailsCodeType">
        <xs:annotation>
          <xs:documentation xml:lang="EN">
            <Format>an..3</Format>
          </xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

<xs:documentation>
  <eTIRName>Guarantee type, coded</eTIRName>
  <CodeList>CL12</CodeList>
  <Status>R</Status>
</xs:documentation>
</xs:annotation>
</xs:element>
<xs:element name="Surety">
  <xs:annotation>
    <xs:documentation>
      <eTIRName>GuaranteeChain</eTIRName>
      <Status>R</Status>
    </xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ID" type="ds:SuretyIdentificationIDType">
        <xs:annotation>
          <xs:documentation xml:lang="EN">
            <Format>an..35</Format>
          </xs:documentation>
          <xs:documentation>
            <eTIRName>Code</eTIRName>
            <Status>R</Status>
          </xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="Principal">
  <xs:annotation>
    <xs:documentation>
      <eTIRName>Holder</eTIRName>
      <Status>R</Status>
    </xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ID" type="ds:PrincipalIdentificationIDType">
        <xs:annotation>
          <xs:documentation xml:lang="EN">
            <Format>an..35</Format>
          </xs:documentation>
          <xs:documentation>
            <eTIRName>Code</eTIRName>
            <Status>R</Status>
          </xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
</xs:sequence>
</xs:complexType>
</xs:element>
</xs:sequence>
</xs:complexType>
</xs:element>
</xs:schema>

```



The original disclaimer field content has been shorten (...) in this document for the sake of readability.

## 9.2.2. Response format

The I2 - **Acceptance results** message should follow the format expressed by the XSD below:

### I2 - Acceptance results response message format

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:I2_1p0="etir:I2:v4.3"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:ds="etir:MetaData_DS:v4.3"
  targetNamespace="etir:I2:v4.3"
  elementFormDefault="qualified">
  <xs:import namespace="etir:MetaData_DS:v4.3" schemaLocation="WCO_MetaData_DS.xsd"/>
  <xs:element name="InterGov">
    <xs:annotation>
      <xs:documentation>
        <eTIRName>Message</eTIRName>
        <Disclaimer>
          Usage and disclaimer clause
        </Disclaimer>
      </xs:documentation>
    </xs:annotation>
    <xs:complexType>
      <xs:sequence>
        <xs:element name="FunctionCode" type="ds:InterGovFunctionCodeType">
          <xs:annotation>
            <xs:documentation xml:lang="EN">
              <Format>n..2</Format>
            </xs:documentation>
            <xs:documentation>
              <eTIRName>Message function, coded</eTIRName>
              <CodeList>CL16</CodeList>
              <Status>R</Status>
              <RestrictedCode>27</RestrictedCode>
              <RestrictedCode>44</RestrictedCode>
            </xs:documentation>
          </xs:annotation>
        </xs:element>
        <xs:element name="FunctionalReferenceID" type="ds:InterGovFunctionalReferenceIDType">
          <xs:annotation>
            <xs:documentation xml:lang="EN">
              <Format>an..70</Format>
            </xs:documentation>
            <xs:documentation>
              <eTIRName>Functional reference</eTIRName>
            </xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

This(ese) schema(s) may be used, copied, amended and furnished to others in whole or in part, without restriction of any kind other than the obligation to keep this usage and disclaimer clause in it (them) and the references to UNECE. However, once modified, schemas may no longer be distributed under the name of UNECE.

Disclaimer: These schemas are provided "as is", without warranty of any kind, either express or implied, including, without limitation, warranties of merchantability, fitness for a particular purpose and non-infringement. The United Nations specifically does not make any warranties or representations as to the accuracy or completeness of any such schemas. The United Nations may add, change, improve or update the schemas without notice. Under no circumstances shall the United Nations be liable for any loss, damage, liability or expense incurred or suffered that is claimed to have resulted from the use of these schemas, including, without limitation, any fault, error, omission, interruption or delay with respect thereto. Under no circumstances, including but not limited to negligence, shall the United Nations or its affiliates be liable for any direct, indirect, incidental, special or consequential damages, even if the United Nations has been advised of the possibility of such damages.

The user specifically acknowledges and agrees that the United Nations is not liable for any conduct of any user. As a condition of using these schemas, the user agrees to indemnify the United Nations and its affiliates from and against any actions, claims, losses, damages, liabilities and expenses arising out of the user's use of these schemas. If the user is dissatisfied with any schema, the user's sole and exclusive remedy is to discontinue using such schemas.

Nothing herein shall constitute or be considered to be a limitation upon or a waiver of the privileges and immunities of the United Nations, which are specifically reserved.

```

</xs:annotation>
</xs:element>
<xs:element name="ID" type="ds:InterGovIdentificationIDType">
  <xs:annotation>
    <xs:documentation xml:lang="EN">
      <Format>an..70</Format>
    </xs:documentation>
    <xs:documentation>
      <eTIRName>Message identifier</eTIRName>
      <Status>R</Status>
    </xs:documentation>
  </xs:annotation>
</xs:element>
<xs:element name="TypeCode" type="ds:InterGovTypeCodeType">
  <xs:annotation>
    <xs:documentation xml:lang="EN">
      <Format>an..3</Format>
    </xs:documentation>
    <xs:documentation>
      <eTIRName>Type, coded</eTIRName>
      <CodeList>CL26</CodeList>
      <Status>R</Status>
      <RestrictedCode>I2</RestrictedCode>
    </xs:documentation>
  </xs:annotation>
</xs:element>
<xs:element name="Error" type="ds:Error" minOccurs="0" maxOccurs="unbounded"/>
<xs:element name="ObligationGuarantee">
  <xs:annotation>
    <xs:documentation>
      <eTIRName>Guarantee</eTIRName>
      <Status>R</Status>
    </xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:sequence>
      <xs:element name="ReferenceID" type="ds:ObligationGuaranteeReferenceIDType">
        <xs:annotation>
          <xs:documentation xml:lang="EN">
            <Format>an..35</Format>
          </xs:documentation>
          <xs:documentation>
            <eTIRName>Reference</eTIRName>
            <Status>R</Status>
          </xs:documentation>
        </xs:annotation>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
</xs:sequence>
</xs:complexType>
</xs:element>
</xs:schema>
    
```



Some field original contents have been shortened (...) in this document for the sake of readability, in particular the whole **header/security** content that is described in the [eTIR web services introduction document](#).



All XSD files can be downloaded on the [dedicated page of the eTIR documentation portal](#).